

EVIDEN

BullSequana EX

Getting Started Guide

The following copyright notice protects this book under Copyright laws which prohibit such actions as, but not limited to, copying, distributing, modifying, and making derivative works.

Copyright ©Bull SAS 2024, part of Eviden group. Eviden is a registered trademark of Eviden SAS. This document, or any part of it, may not be reproduced, copied, circulated and/or distributed nor quoted without prior written approval from Bull SAS.

Trademarks and Acknowledgements

We acknowledge the right of proprietors of trademarks mentioned in this manual.

All brand names and software and hardware product names are subject to trademark and/or patent protection.

Quoting of brand and product names is for information purposes only and does not represent trademark and/or patent misuse.

Hardware

September 2024

**Eviden
30 bis rue du Nid de Pie
49000 Angers
FRANCE**

The information in this document is subject to change without notice. Eviden will not be liable for errors contained herein, or for incidental or consequential damages in connection with the use of this material.

Table of Contents

| | |
|--|------------|
| Preface | p-1 |
| Intended Readers | p-1 |
| Chapter 1. Connecting a BullSequana EX server | 1-1 |
| 1.1. Connecting the server to the power supply | 1-1 |
| 1.2. Accessing the Server Hardware Console (SHC) | 1-4 |
| 1.2.1. Obtaining an address via a DHCP server | 1-4 |
| 1.2.2. Obtaining an IP address with an auto-discovery tool | 1-6 |
| 1.2.3. Connecting to the SHC for the first time | 1-9 |
| 1.3. Connecting the server to a monitor (optional) | 1-10 |
| Chapter 2. Configuring general parameters | 2-1 |
| 2.1. Setting the date and time | 2-2 |
| 2.2. Configuring network settings | 2-4 |
| 2.3. Changing the initial user password | 2-6 |
| 2.4. Testing parameters | 2-8 |
| Chapter 3. Installing an operating system | 3-1 |
| 3.1. Installing an OS | 3-2 |
| 3.2. Booting the operating system (OS) | 3-6 |
| Chapter 4. Power operations | 4-1 |
| 4.1. Powering on the server with the power button | 4-2 |
| 4.2. Powering on from the SHC | 4-4 |
| 4.3. Powering off the server with the power button | 4-5 |
| 4.4. Rebooting or shutting down from the SHC | 4-7 |
| 4.5. Configuring the power restore policy | 4-8 |
| 4.6. Managing power usage | 4-9 |
| Chapter 5. Maintenance operations | 5-1 |
| 5.1. Rebooting the BMC | 5-1 |
| 5.2. Checking event logs | 5-2 |
| 5.3. Checking the sensors | 5-3 |
| 5.4. Collecting Logs | 5-4 |
| 5.5. Managing firmware versions | 5-6 |
| Chapter 6. Managing RAID configurations | 6-1 |

| | |
|-----------------------------------|-----|
| 6.1. Configuration rules | 6-1 |
| 6.2. Disks location | 6-2 |
| 6.3. Intel VROC mapping | 6-3 |
| 6.4. Configuring RAID disks | 6-4 |

| | |
|---|------------|
| Appendix A. Pre-installation steps for Windows Server 2022 | A-1 |
|---|------------|

Preface

This guide explains how to set up the server.

See The Bull support web site for the most up to date product information, documentation, firmware updates, software fixes and service offers:
<https://support.bull.com>

Important **ATTENTION: Please read carefully the safety instructions before you perform the procedures described in this manual.**
Multilingual Safety Notices Guide

Intended Readers

This guide is intended for use by system administrators and operators.

Chapter 1. Connecting a BullSequana EX server

Important The steps in this chapter must be followed in the order indicated.

See The Installation Guide and the documentation set for more information.

1.1. Connecting the server to the power supply


1. Connect the server to the power supply

Important The site power breaker must be OFF when the server is connected to the power supply. The site power supply must remain OFF until the system is ready to be powered on.

1. Locate the power supply connection.


BullSequana EXR

 Rear view



BullSequana EXD

 Rear view

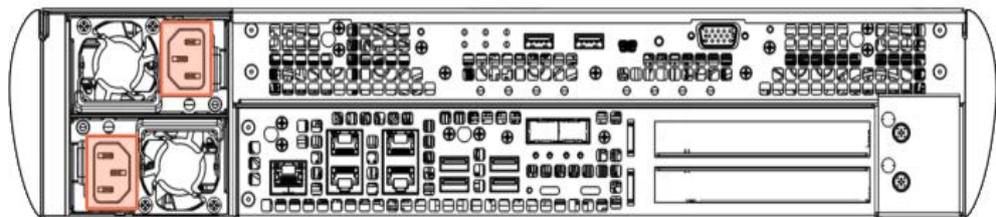


2. Connect the server to the Power Distribution Unit (PDU).

Plug the power cable into power socket and the required PDU.

Note If the server is installed in a rack cabinet, route the power cable along the cabinet flange to the PDU.


BullSequana EXR

 Rear view

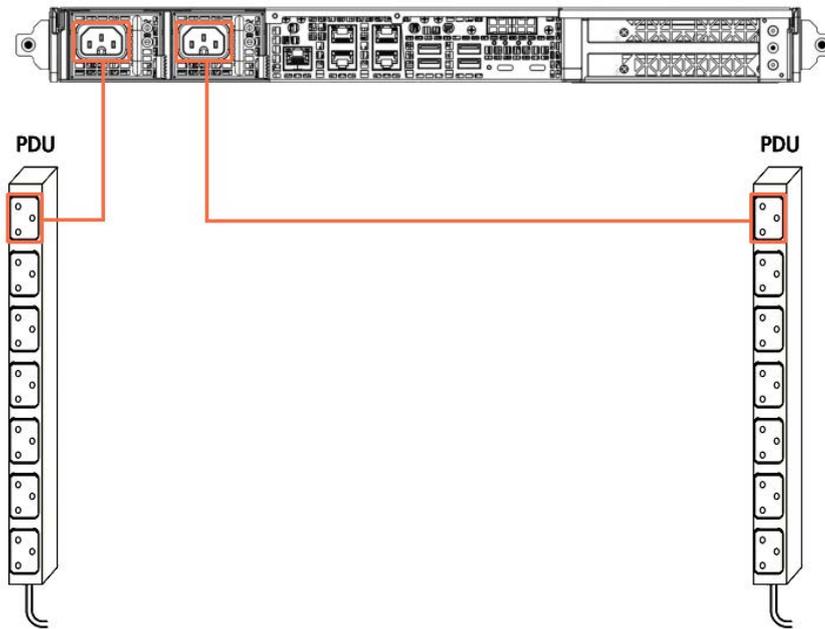

BullSequana EXD

 Rear view

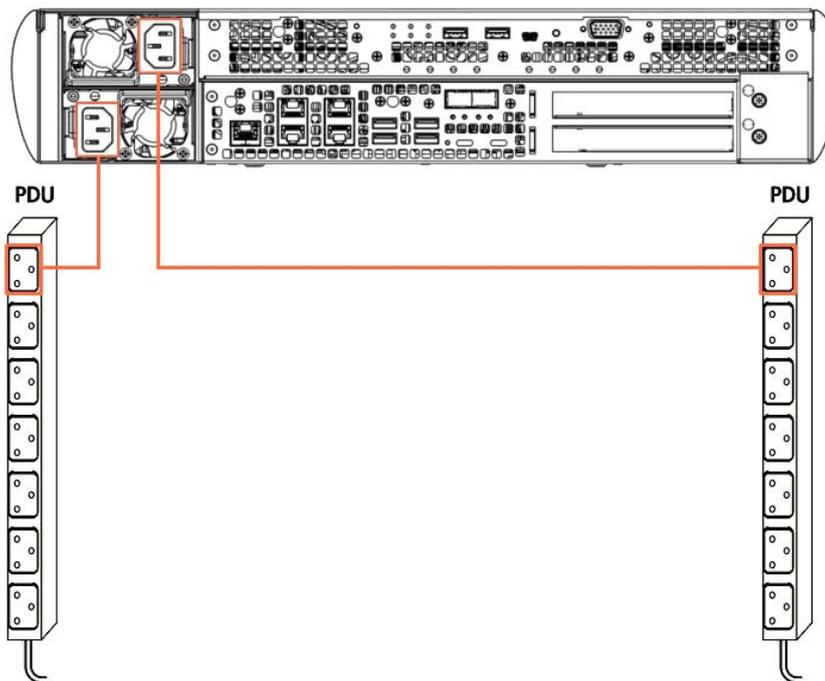


2. Power on the server to standby

1. Turn the site power breakers ON.
2. Check that the power status LED blinks green to indicate that the server is connected to the power supply.


BullSequana EXR




2.5 inch SATA disk option

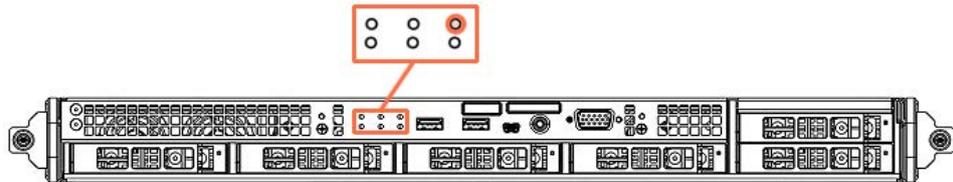

M.2 NVMe disk option

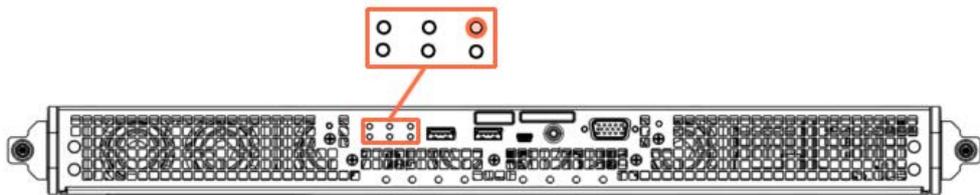

BullSequana EXD

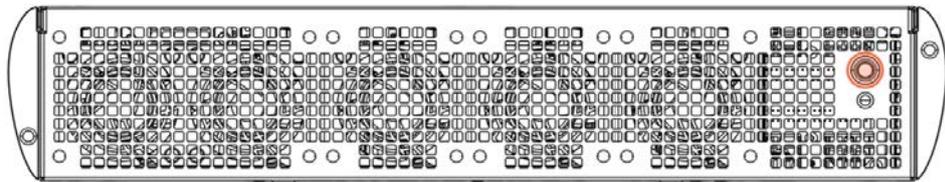

1.2. Accessing the Server Hardware Console (SHC)

The Server Hardware Console (SHC) for BullSequana EX servers provides a web based interface to manage, configure and monitor the server.

The SHC is powered by OpenBMC, an open source implementation of the Baseboard Management Controller (BMC) firmware stack

See The SHC Reference Guide and the documentation set for more information.

The first connection to the SHC can be made using either an IP address allocated by DHCP or an auto-discovery tool.

1.2.1. Obtaining an address via a DHCP server

Prerequisites

- A DHCP server is installed on the network subnet
- The laptop used to access the BullSequana EX server is on the same network subnet

Procedure


1. Connect the server to the LAN

Connect the server BMC port to the LAN via a RJ45 Ethernet cable.

Important If a switch is used the ports must support a bandwidth of 1 Gb/s.


BullSequana EXR

Rear view

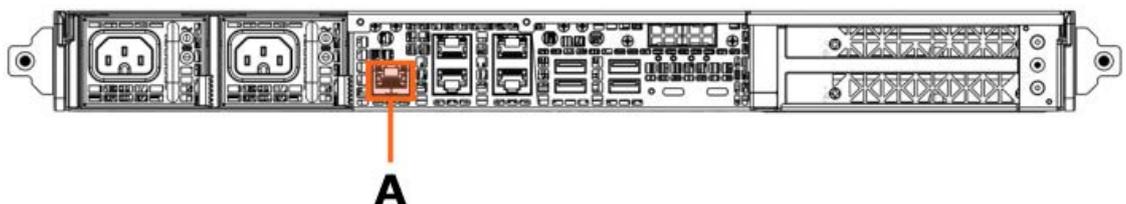

BullSequana EXD

Rear view

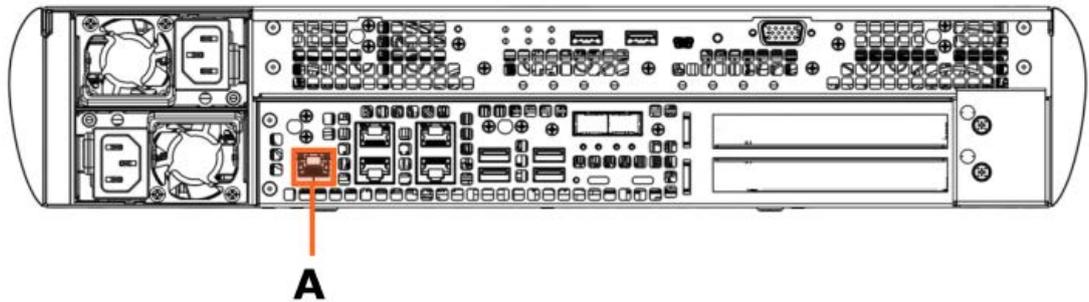


2. Check the LAN connection

Check the LEDs are on for the BMC port.

3. Obtain the MAC address for the server

1. Remove the top cover and if necessary the air duct.
2. Locate the label displaying the server MAC address (A) on the motherboard, next to the memory modules.

Top view

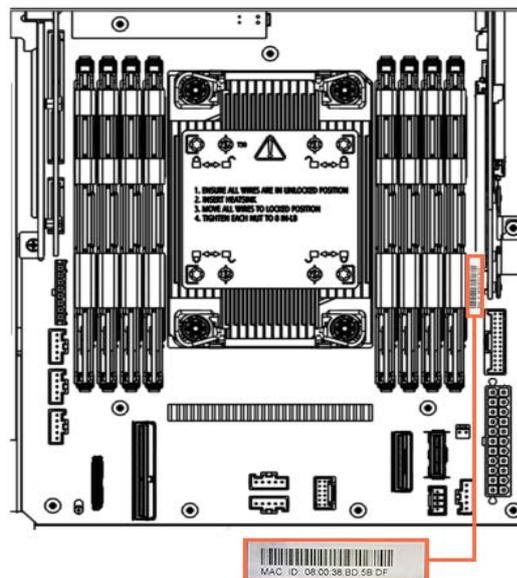

3. Note the server MAC address.

4. Obtain an IP address for the server

There are two possibilities according to the network system management:

- Retrieve an IP address from the DHCP server table
- Ask the network system administrator to allocate a DHCP IP address using the MAC address of the server

5. Note the IP address obtained

1.2.2. Obtaining an IP address with an auto-discovery tool

Prerequisite

A laptop is connected to the server via the LAN

Procedure

Note In this procedure the Bonjour browser is used as an example of an IP auto-discovery tool.


1. Connect the server to the LAN

Connect the server BMC port to the LAN via a RJ45 Ethernet cable.

Important If a switch is used the ports must support a bandwidth of 1 Gb/s.


BullSequana EXR

Rear view

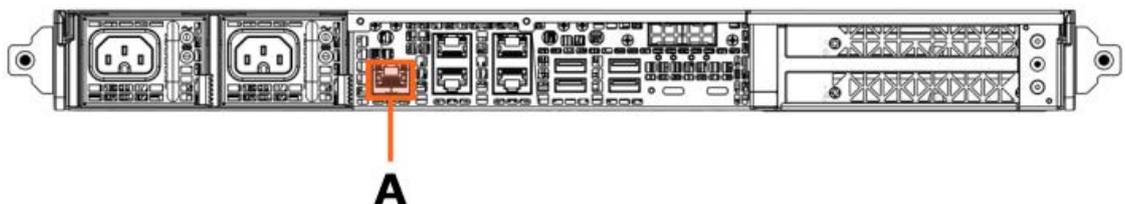

BullSequana EXD

Rear view

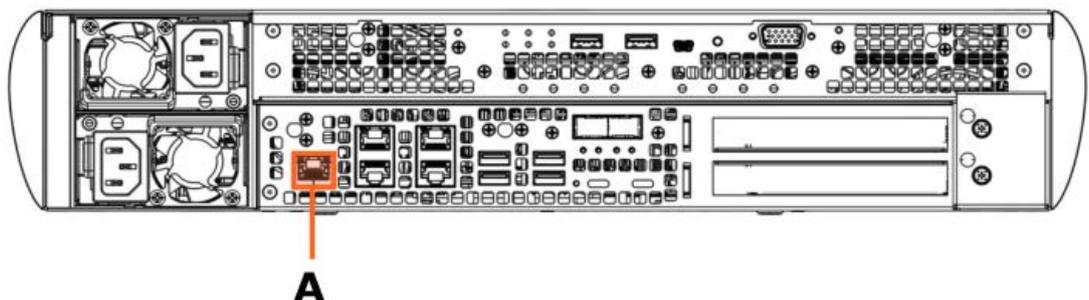

2. Check the LAN connection

Check the LEDs are on for the BMC port.


3. Install Bonjour on the laptop

1. Download the latest **BonjourBrowserSetup.exe** file.
2. Run **BonjourBrowserSetup.exe** to install Bonjour.

4. Launch the Bonjour browser on the laptop

5. Refresh the Bonjour browser


1. Click the Refresh button at the top on the right of the browser window.

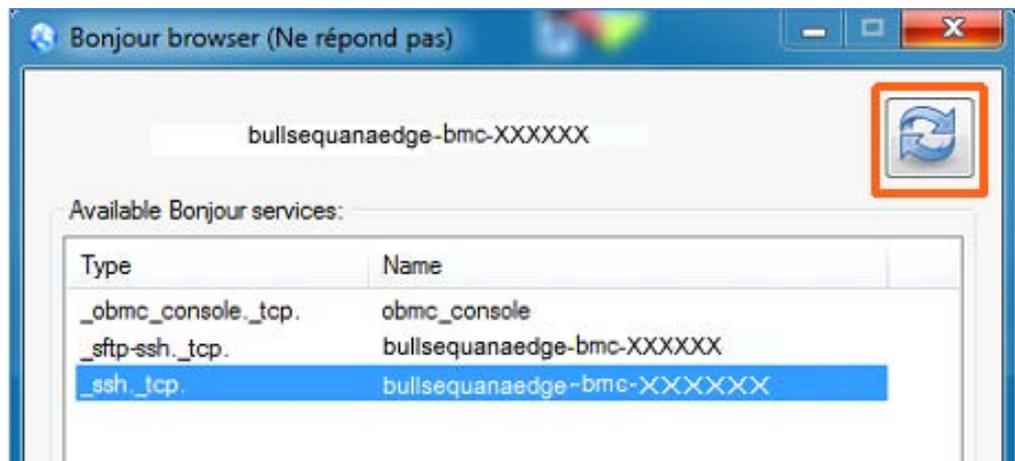

2. The available services are displayed.

6. Note the server IP address

1. Select the **_ssh._tcp** Bonjour service for the server BMC.
2. The Bonjour server IP address is displayed in the **IP addresses** field.

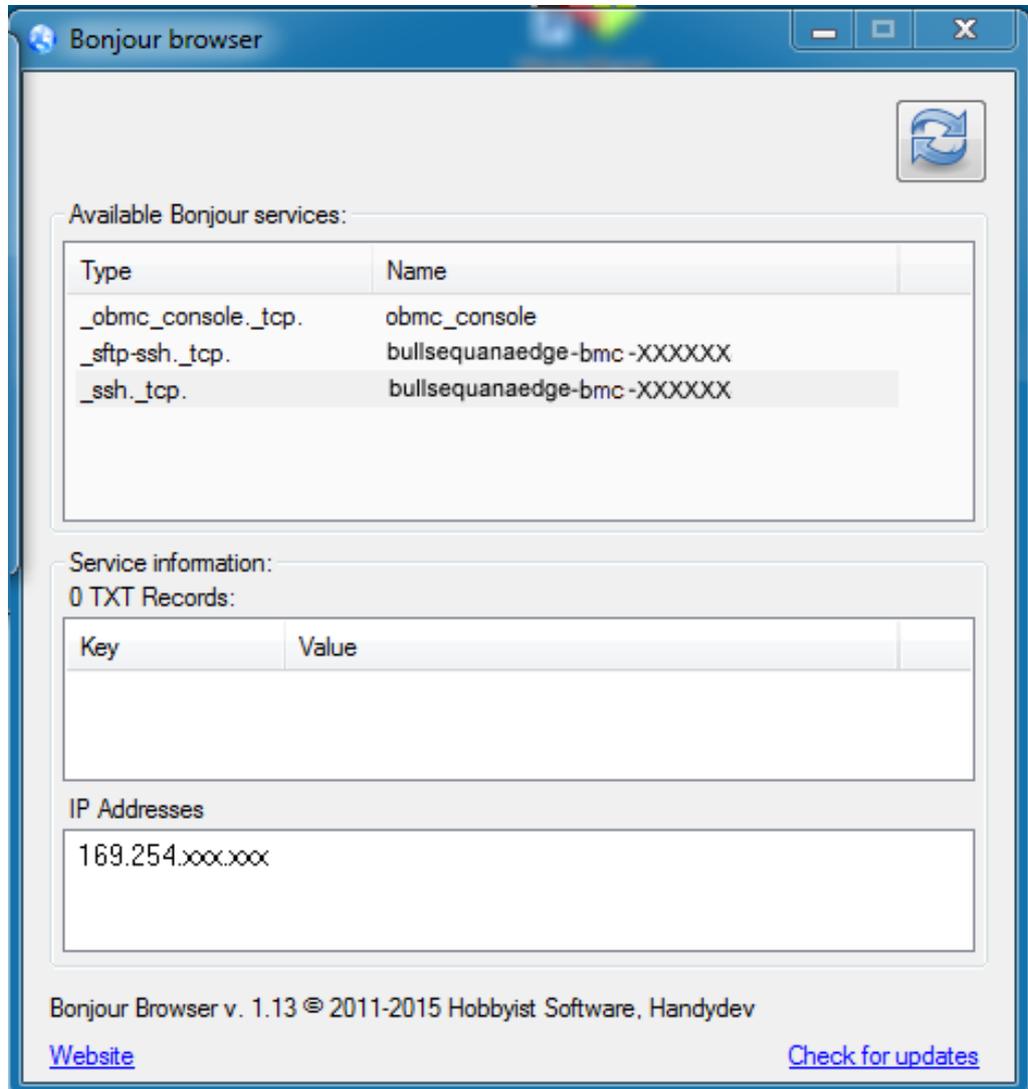

3. Note the IP address indicated.

1.2.3. Connecting to the SHC for the first time


Prerequisites

- An IP address is available for the server
- Chrome or Firefox web browsers are recommended
- Setting the language of the web browser to English is recommended

Procedure

Note The connection to the SHC must be made using the https protocol.

1. Open a web browser on the laptop.
2. Enter the server IP address into the address bar, using the https secure protocol.
3. Ignore all security messages displayed, including advanced messages. The SHC authentication page opens.

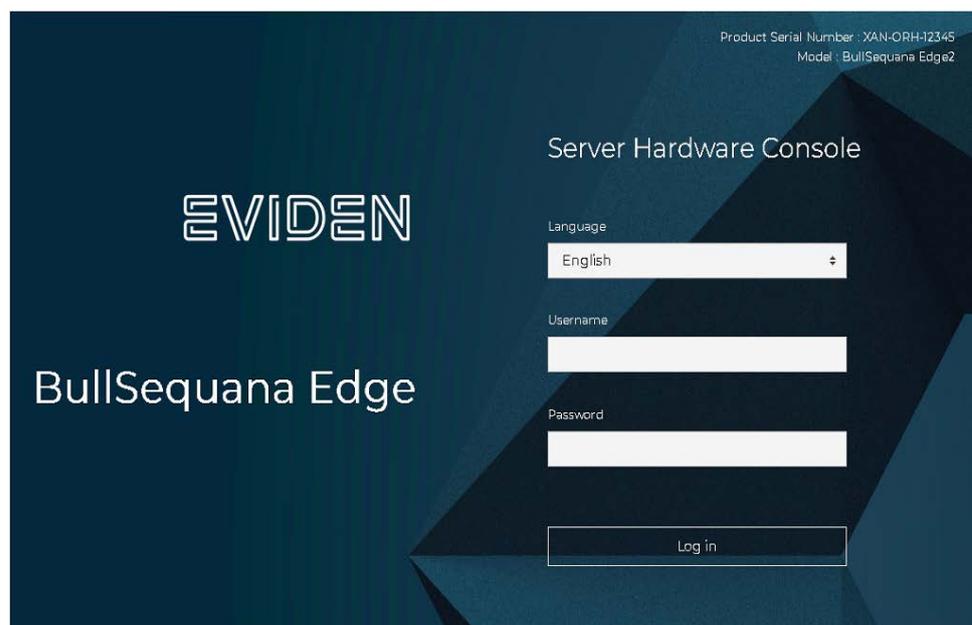

4. Complete the Username and Password fields and click **Log in**. The **Overview** page opens.

| SHC default user account | |
|--------------------------|--|
| Username | admin |
| Password | OpenBmc* The 0 in the default password is the number zero. |

See SHC Reference Guide for more information.


1.3. Connecting the server to a monitor (optional)

Connect a monitor to the VGA port (A).


BullSequana EXR




2.5 inch SATA disk disk option

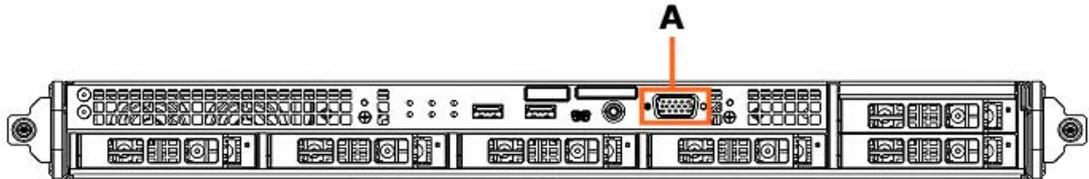

M.2 NVMe disk disk option

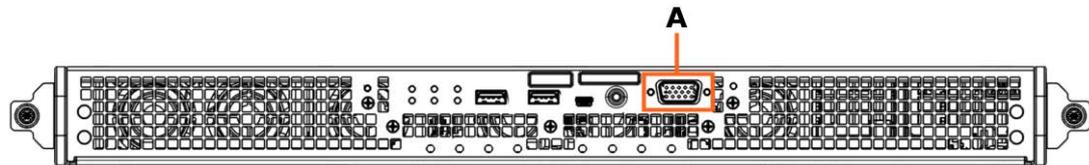

BullSequana EXD

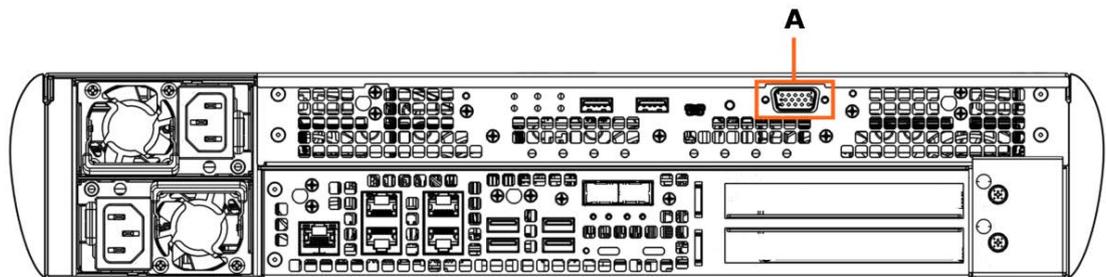

Chapter 2. Configuring general parameters

Note The parameters listed in this chapter are configured via the Server Hardware Console (SHC). A connection to the SHC must be in place, as previously described.

When a BullSequana EX is configured for the first time, it is advisable to note the following details:

| Data required | Value |
|---------------------------|-------|
| Hostname | |
| User name | |
| Password | |
| DNS server IP address(es) | |
| Gateway IP address | |
| NTP server IP address(es) | |
| Power restore policy | |
| Rsyslog IP address | |
| Rsyslog port | |

2.1. Setting the date and time

1. From the **Configuration** tab, click **Date and time settings**. The **Date and time settings** page opens.

Date and time settings

i To change how date and time are displayed (either UTC or browser offset) throughout the application, visit [Profile Settings](#)

| | |
|------------|--------------|
| Date | 24-hour time |
| 2022-01-11 | 08:11:25 UTC |

Configure settings

Manual

| | |
|---|------------------------------------|
| Date | 24-hour time (UTC) |
| YYYY-MM-DD | HH:MM |
| <input type="text" value="2022-01-11"/> | <input type="text" value="08:11"/> |

NTP

| | | |
|----------------------|----------------------|----------------------|
| Server 1 | Server 2 | Server 3 |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |

2. Select the date and time configuration:
 - Manual
 - Network Time Protocol (NTP) servers

Note It is recommended to configure an NTP server. Time and date settings configured manually will be lost when the BMC is reset.

3. Click **Save settings**.

4. Click **Profile Settings** at the top of the page. The **Profile settings** page opens.

Profile settings

Profile information

Username
admin

Privilege
Administrator

Change password

New password

Password must be between 8 – 20 characters ... 

Confirm new password

Timezone display preference

Select how time is displayed throughout the application

Timezone

- Default (UTC)
- Browser offset (CEST UTC+2)

[Save settings](#)

5. Select the timezone display:
 - Default
 - Browser offset
6. Click **Save settings**.

2.2. Configuring network settings

Note The server hostname may be modified in the screen below.

1. From the **Configuration** tab, click **Network settings**. The **Network settings** page opens.

Network settings

Configure network settings for the BMC

i Changing BMC network settings may result in a loss of the remote connection to the BMC. Please ensure that all the values are correct before applying changes so that you can reconnect remotely to the BMC.

System

Default gateway

XX.XX.XX.XX 

Hostname

localhost

MAC address

08:00:38:bd:62:7a

IPV4

IPV4 configuration

An IP address must be available to enable DHCP or Static configuration

- DHCP
 Static

DHCP

| IP address | Subnet mask | |
|-------------|---------------|---|
| XX.XX.XX.XX | 255.255.255.0 |  |

Static

| IP address | Subnet mask |
|--------------------|-------------|
| No items available | |

 Add static IP

Static DNS

| IP address |
|--------------------|
| No items available |

 Add DNS server

Save settings

| System | |
|-------------------|---|
| Default gateway | Default gateway IP address |
| Hostname | The server host name |
| Mac address | The server MAC address |
| IP4V | |
| DHCP | When enabled, the server IP address is retrieved from a DHCP server |
| Static | When enabled, the server IP address is static |
| DHCP | |
| IP address | Server IP address |
| Subnet mask | Sub-net mask for the host |
| Static | |
| IP address | Server IP address |
| Subnet mask | Sub-net mask for the host |
| Add static IP | Click this button to add a static IP address |
| Static DNS | |
| IP address | DNS server IP address |
| Add DNS server | Click this button to add a DNS server address |

2. Enter the system parameters: default gateway and hostname.
3. Select IPV4 configuration: DHCP or Static.
4. Add a static IP address, if required.
5. Add a DNS server if required.
6. Click **Save settings**.

2.3. Changing the initial user password

Important It is strongly recommended to change the initial password once the setup is completed, taking care to record the new account details for subsequent connections.

1. From the user profile button, click **Profile settings**.



The **Profile settings** page opens.

Profile settings

Profile information

Username
admin
Privilege
Administrator

Change password

New password

Password must be between 8 – 20 characters ... ⓘ

Confirm new password

Timezone display preference

Select how time is displayed throughout the application

Timezone

- Default (UTC)
 Browser offset (CEST UTC+2)

Save settings

2. Enter and confirm the new password.
 - The password must be between 8 and 20 characters long
 - The password must be a mixture of upper case letters, lower case letters, numbers and special characters
 - The password must be different from the user name
3. Click **Save settings**.

Note According to the localisation the timezone can also be changed, for example in France UTC+2 would be used.

2.4. Testing parameters

Stop and restart the Server Hardware Console (SHC) to verify that the new parameters have taken effect.

Procedure

1. Stop the SHC


From the user profile button, click **Log out** to stop the SHC.



2. Start the SHC

Note The connection to the SHC must be made using the https protocol.

1. Open a web browser on the laptop.
2. Enter the server IP address into the address bar, using the https secure protocol.
3. Ignore all security messages displayed, including advanced messages. The SHC authentication page opens.

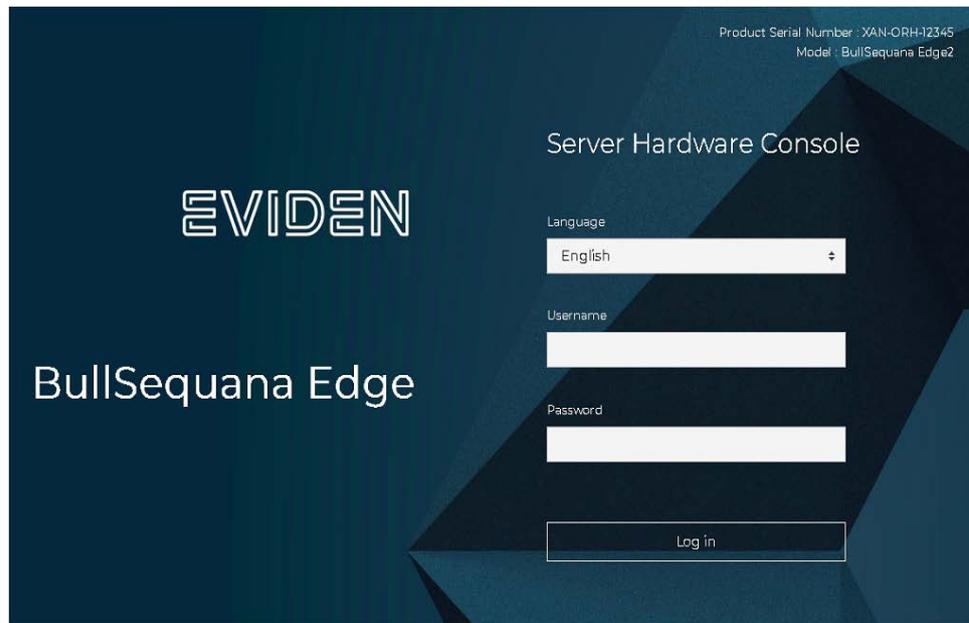

Chapter 3. Installing an operating system

The operating system is installed from one of the following:

- A bootable USB drive
- A Pre-boot eXecution Environment (PXE)
- A virtual media device

Prerequisites

- The server power status is Off
- Depending on the installation option:
 - A bootable USB drive with the OS to be installed is plugged into a USB port
 - A Pre-boot eXecution Environment (PXE) has been set up and is accessible
 - The location for the virtual media ISO file is known
 - For Windows Server 2022 installation, in some cases, it is necessary to load a driver to be able to access the storage devices

See [Appendix A. Pre-installation steps for Windows Server 2022](#)


3.1. Installing an OS

Procedure

1. Connect to the SHC

Note The connection to the SHC must be made using the https protocol.

1. Open a web browser on the laptop.
2. Enter the server IP address into the address bar, using the https secure protocol.
3. Ignore all security messages displayed, including advanced messages. The SHC authentication page opens.

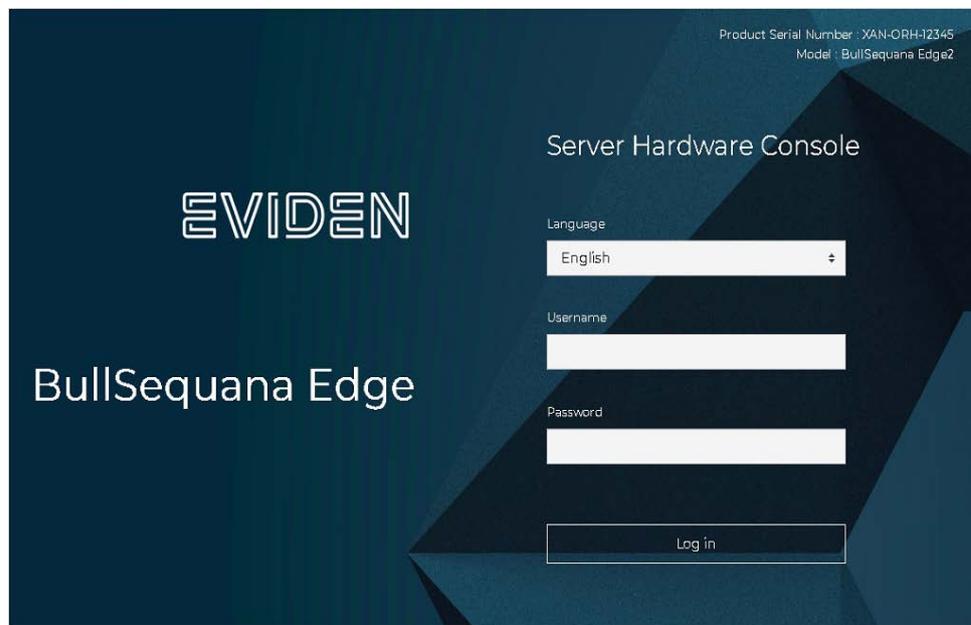

2. Create a virtual media session if this OS installation option is to be used

Note Only users with Administrator privilege have access to this feature.

1. From the **Control** tab, click **Virtual media**. The **Virtual media** page opens.

Virtual media

Virtual image redirection

Virtual media device

Add file

Start

2. Click **Add** file.
3. Select an ISO file for the boot.
4. Click **Start**.

3. Power on the server


1. From the **Control** tab, click **Server power operations**. The **Server power operations** page opens.
2. In the **Operations** section, click **Power on**.

4. Launch the remote system console

From the **Control** tab, click **KVM**. The **KVM** page opens.

5. Access the BIOS interface

1. Wait a few minutes for the following screen to be displayed.

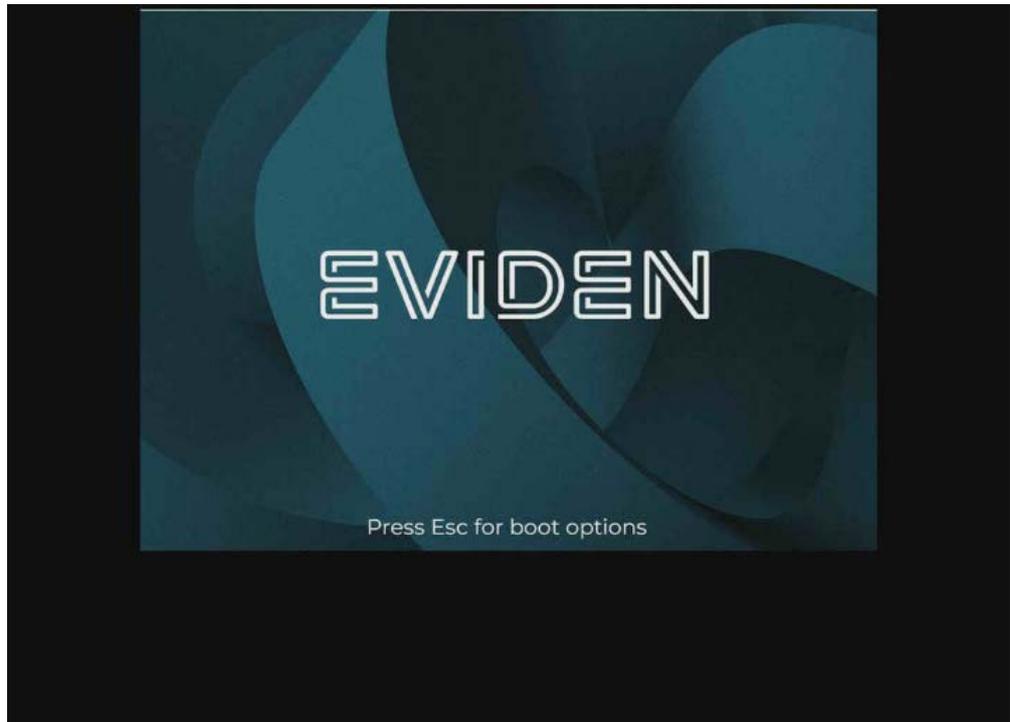

2. Press **[ESC]** to display the BIOS interface.

1. Select **Boot Manager** from the main menu using the navigation arrows and press **[Enter]**.



6. Define the boot device

1. Select the boot device and press **[Enter]**.

| Boot device | Action |
|------------------------|--|
| Bootable USB drive | Select the corresponding entry in the USB section |
| PXE server | Select the corresponding entry in the Network section |
| Virtual media ISO file | Select the corresponding entry in the USB section |



2. Follow the instructions displayed to Install the OS.
3. Select the system settings required.

3.2. Booting the operating system (OS)

Note It is advisable to boot the OS using the BIOS interface for the first time in order to verify that the installation is correct. If OK, the operating system is booted in the normal way for subsequent boots.

Prerequisite


The server power status is Off.

Procedure

1. Connect to the SHC

Note The connection to the SHC must be made using the https protocol.

1. Open a web browser on the laptop.
2. Enter the server IP address into the address bar, using the https secure protocol.
3. Ignore all security messages displayed, including advanced messages. The SHC authentication page opens.

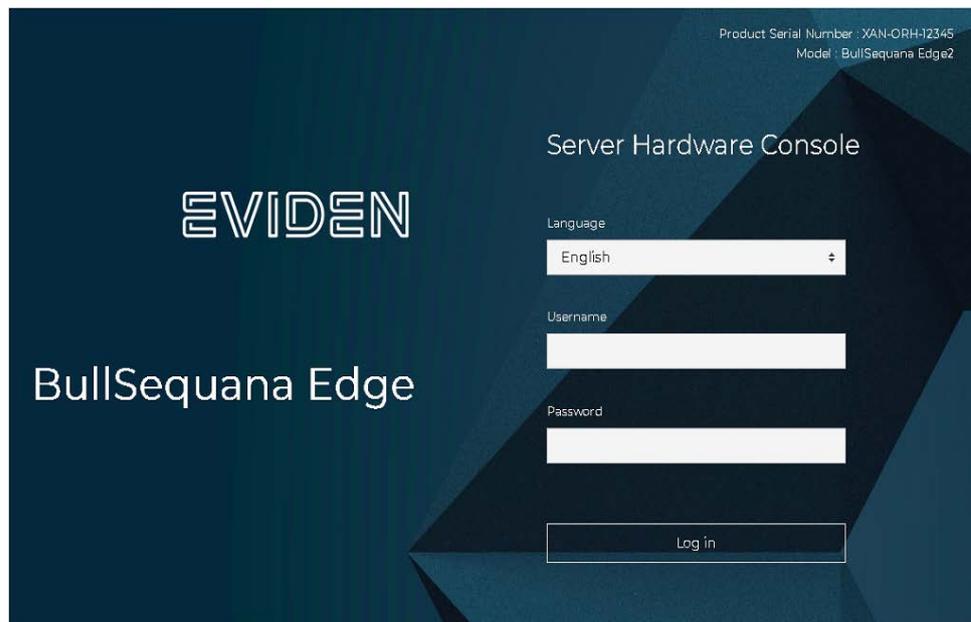

2. Power on the server


1. From the **Control** tab, click **Server power operations**. The **Server power operations** page opens.
2. In the **Operations** section, click **Power on**.

3. Launch the remote system console

From the **Control** tab, click **KVM**. The **KVM** page opens.

4. Access the BIOS interface

1. Wait a few minutes for the following screen to be displayed.

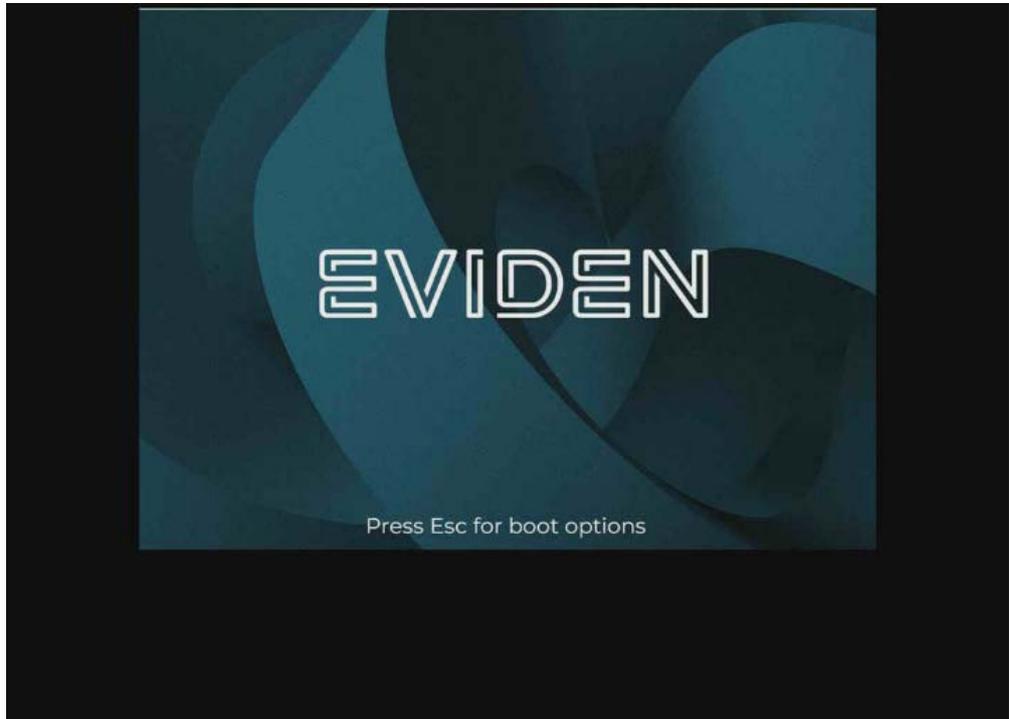


2. Press **[ESC]** to display the BIOS interface.
 1. Select **Boot Manager** from the main menu using the navigation arrows and press **[Enter]**.



5. Select the boot option

1. Select the entry corresponding to the OS and press [Enter] to exit setup and complete the system boot.

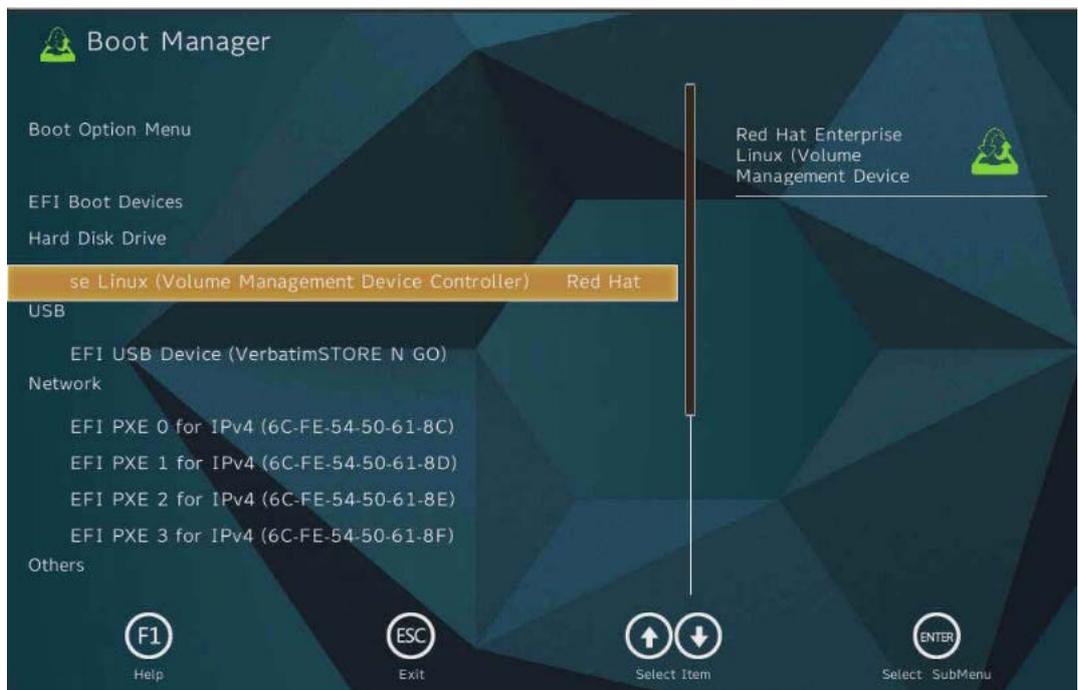

2. Wait until the boot completes to verify that the operating system has installed correctly.

Chapter 4. Power operations

A BullSequana EX server can be powered on and off using:

- The power button at the front of the server
- The Server Hardware Console (SHC)

See The Description Guide for more information about the ports and LEDs and the SHC Reference Guide.


4.1. Powering on the server with the power button

1. Check that the power status LED (A) is blinking green to indicate that the server power status is Off.
2. Press the power button (B) for approximately two seconds.


BullSequana EXR




2.5 inch SATA disk option

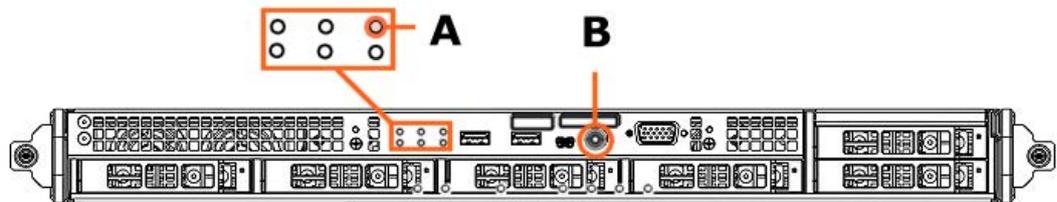


M.2 NVMe disk option

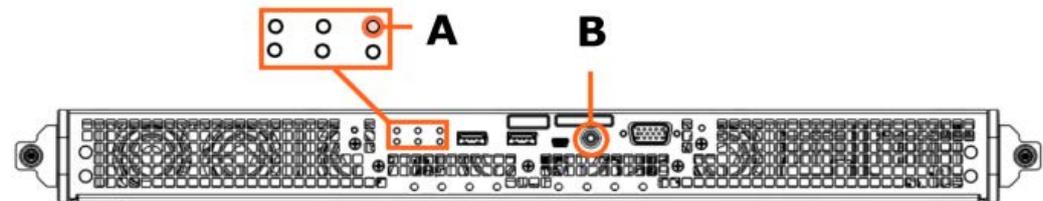

BullSequana EXD

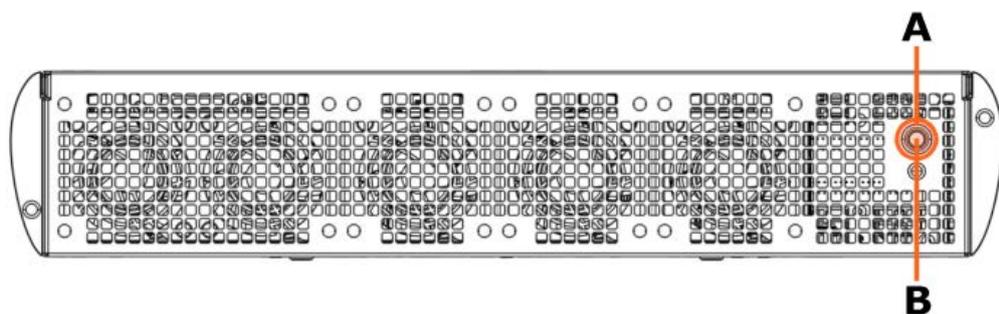

 Rear view

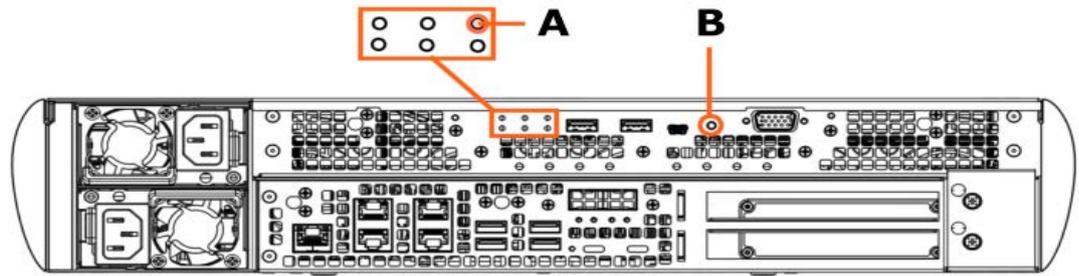

3. Check that the power button LED (A) is on and solid green to indicate that the server power status is Running.

4.2. Powering on from the SHC

1. From the **Control** tab, click **Server power operations**. The **Server power operations** page opens.
2. In the **Operations** section, click **Power on**.

Server power operations

Current status

Host status
Not available

Last power operation
2023-06-08 08:32:26 UTC

Last memory size
448 GiB

Host OS boot settings

Boot settings override

None

Instance 0

Enable one time boot

TPM required policy
Enable to ensure the system only boots when the TPM is functional.

Enabled

Save

Operations

Power on

A message is displayed.

Operations

i There are no options to display while a power operation is in progress. When complete, power operations will be displayed here.

Note After initiating the power on of the system, there is a 30 second delay before the update of the host power status to avoid sensor fluctuation. It is therefore necessary to wait 30 seconds before refreshing the Server power operations page of the Server Hardware Console (SHC) to see the updated power status after a power on.


4.3. Powering off the server with the power button

1. Check that the power button LED (A) is on and solid green to indicate that the server power status is Running.
2. Press the power button (B) for approximately four seconds.


BullSequana EXR




2.5 inch SATA disk option

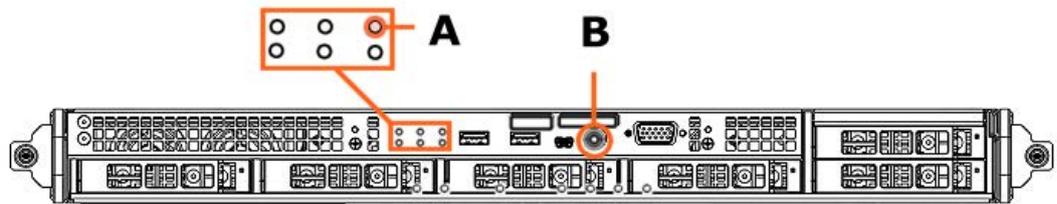


M.2 NVMe disk option

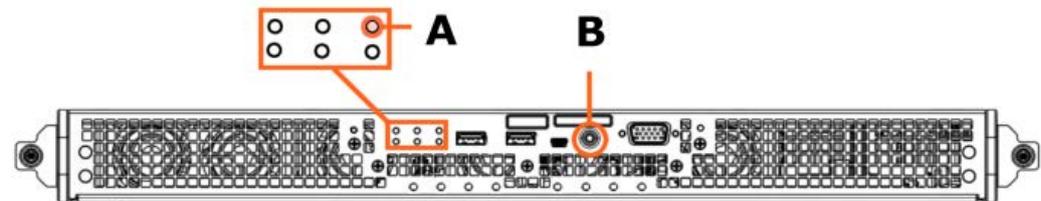

BullSequana EXD

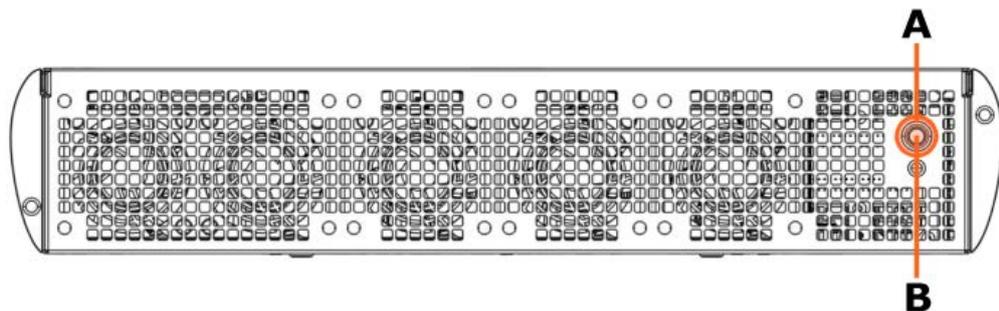

 **Rear view**

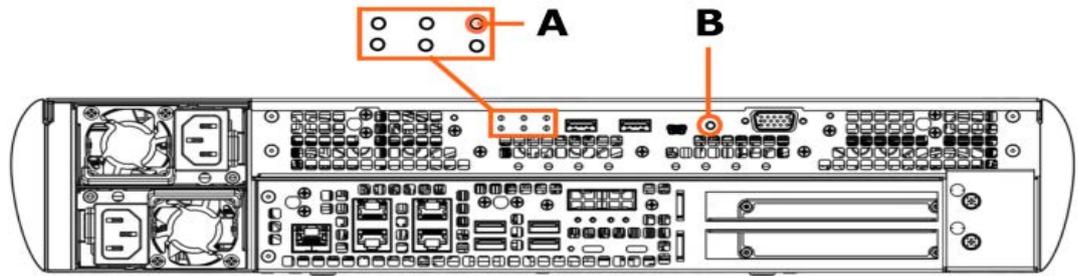

3. Check that the power status LED (A) is blinking green to indicate that the server power status is Off.

4.4. Rebooting or shutting down from the SHC

1. From the **Control** tab, click **Server power operations**. The **Server power operations** page opens.
2. In the **Operations** section, select the mode and click **Reboot** or **Shutdown**.

Server power operations

Current status

Host status
Not available

Last power operation
2023-06-08 08:32:26 UTC

Last memory size
448 GiB

Host OS boot settings

Boot settings override

None

Instance 0

Enable one time boot

TPM required policy
Enable to ensure the system only boots when the TPM is functional.

Enabled

Save

Operations

Reboot server

- Orderly - OS shuts down, then server reboots
- Immediate - Server reboots without OS shutting down; may cause data corruption

Reboot

Shutdown server

- Orderly - OS shuts down, then server shuts down
- Immediate - Server shuts down without OS shutting down; may cause data corruption

Shut down

4.5. Configuring the power restore policy

The power restore policy determines how the system starts after a power disturbance.

1. From the **Control** tab, click **Power restore policy**. The **Power restore policy** page opens.

Power restore policy

Configure power policy to determine how the system starts after a power disturbance.

Power restore policies

- Always on - The system always powers on when power is applied.
- Always off - The system always remains powered off when power is applied.
- Restore - The system returns to its last on or off power state when power is applied.

Save settings

2. Select the policy.

| Power restore policy | Description |
|----------------------|--|
| Always On | The system always powers on when power is applied |
| Always Off | The system always remains powered off when power is applied |
| Last state | The system returns to its last power state when power is applied |

3. Click **Save Settings**.

4.6. Managing power usage

Note Only users with Administrator privilege have access to this feature.

1. From the **Control** tab, click **Manage power usage**. The **Manage power usage** page opens.

Manage power usage

Set a power cap to keep power consumption at or below the specified value in watts

Current power consumption
Not available

Power cap setting

Apply power cap

Power cap value (in watts)

Value must be between 1 and 1000

Save

2. To set a power cap:
 - a. Select **Apply power cap**.
 - b. Set the power cap value in the **Power Cap Value (in watts)** box.
3. Click **Save**.

Note The power consumption and power cap value are indicated on the Overview page.

Chapter 5. Maintenance operations

5.1. Rebooting the BMC

Note Only users with Administrator privilege have access to this feature.

1. From the **Control** tab, click **Reboot BMC**. The **Reboot BMC** page opens.

Reboot BMC

Last BMC reboot
2023-06-07 15:07:20 UTC

When you reboot the BMC, your web browser loses contact with the BMC for several minutes. When the BMC is back online, you may need to log in again.

Reboot BMC(s)

2. Click the **Reboot BMC** button and confirm.

A success message is displayed.

Reboot BMC



5.2. Checking event logs

Displaying event logs

From the **Health** tab, click **Event logs**. The **Event logs** page opens.

The screenshot shows the 'Event logs' interface. At the top right is a 'Delete all event logs' button (C). Below it is a search bar (A) with 'Search logs' and '2294 items'. Underneath are 'From date' and 'To date' input fields (B) with 'YYYY-MM-DD' placeholders. A 'Filter' button (D) is on the right. The main table (E) has columns for ID, Severity, Date, and Description. Three log entries are visible, each with an export icon.

| Mark | Description |
|------|------------------------------|
| A | Alphabetical search |
| B | Date range search |
| C | Log deletion |
| D | Severity filter |
| E | Export of log to a json file |

Filtering event logs

Enter one or more search criteria in the alphabetical search (A), date range (B) and severity (D) fields to filter the event logs displayed.

Exporting event logs

Click the arrow (E) to export an event log to a json file.

Deleting event logs

Click (C) to delete all event logs.

5.3. Checking the sensors

Displaying sensors

From the **Health** tab, click **Sensors**. The **Sensors** page opens.

Sensors

A 6 of 21 items

B

C

| <input type="checkbox"/> | Sensor type | Name | Status | Lower critical | Lower warning | Current value | Upper warning | Upper critical |
|--------------------------|-------------|-------------|--------|----------------|---------------|---------------|---------------|----------------|
| <input type="checkbox"/> | Fan | Fan0 DIMM R | OK | 5600 RPM | 8000 RPM | 8206 RPM | 40000 RPM | 41800 RPM |
| <input type="checkbox"/> | Fan | Fan1 CPU | OK | 5600 RPM | 8000 RPM | 8252 RPM | 40000 RPM | 41800 RPM |
| <input type="checkbox"/> | Fan | Fan2 CPU | OK | 5600 RPM | 8000 RPM | 8183 RPM | 40000 RPM | 41800 RPM |
| <input type="checkbox"/> | Fan | Fan3 DIMM L | OK | 5600 RPM | 8000 RPM | 8104 RPM | 40000 RPM | 41800 RPM |
| <input type="checkbox"/> | Fan | Fan4 GPU | OK | 5600 RPM | 8000 RPM | 8115 RPM | 40000 RPM | 41800 RPM |
| <input type="checkbox"/> | Fan | Fan5 GPU | OK | 5600 RPM | 8000 RPM | 8241 RPM | 40000 RPM | 41800 RPM |

| Mark | Description |
|------|---------------------|
| A | Alphabetical search |
| B | Status filter |
| C | Sensor type filter |

Filtering sensors

Enter one or more search criteria in the alphabetical search (A), date range (B) and severity (C) fields to filter the sensors displayed.

5.4. Collecting Logs

A log file is a collection of the logs for the connected server.

Displaying logs

From the **Health** tab, click **Log Collect**. The **Log Collect** page opens.

The screenshot shows the 'Log Collect' page. At the top, there is a section 'Initiate log' with a blue button labeled 'Get logs' (marked with 'A'). Below this is a light blue information box with a question mark icon and the text 'Create a log collection file for the connected module.' The main section is 'Logs available', which contains a search bar with a magnifying glass icon and the text 'Search logs' (marked with 'B'). To the right of the search bar, it says '1 items'. Below the search bar are two date selection fields: 'From date' and 'To date', both with a calendar icon and the placeholder text 'YYYY-MM-DD' (marked with 'C'). Below these fields is a table with columns 'Date and time', 'ID', and 'Size'. The table has one row with the following data: '2023-06-01 12:37:53 UTC', '1', and '0.376 MB'. To the right of the table, there are two icons: a download icon (marked with 'D') and a delete icon (marked with 'E').

| Mark | Description |
|------|---------------------|
| A | Log file creation |
| B | Alphabetical search |
| C | Data range search |
| D | Log file download |
| E | Log file deletion |

Filtering logs

Enter the search item (B) and / or the date range (C) to filter the log files displayed.

Collecting logs


Note Due to space restrictions, it is advisable to delete the existing logs before perform a new log collect.

Click **Get logs** (A) to create a new log collection.

Log Collect

Initiate log

Get logs

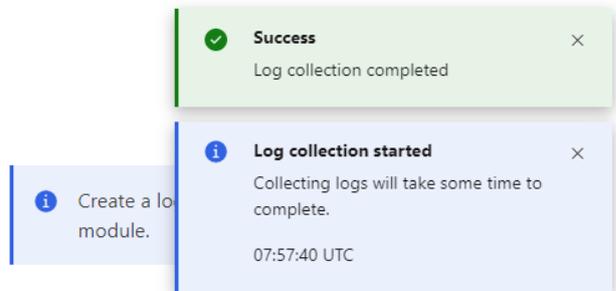

Exporting event logs

Click the arrow (D) to download a log file.

Deleting event logs

Click (E) to delete the log file.

5.5. Managing firmware versions

1. From the **Configuration** tab, click **Firmware**. The **Firmware** page opens.

Firmware

Firmware version

| Component | Version |
|-----------|-----------------------|
| BIOS | BIOS_ESR160.37.01.001 |
| BMC | 160.02.0004 |
| FPGA | 1.E.0.0 |

Update firmware

Image file
Only .tar, .tar.gz files accepted

Force Update

Firmware update may take up 10 minutes due to security features

2. To update a firmware version, click **Add file** to select the firmware version file, and click **Start update**.

Notes

- It is strongly recommended to power off the system before updating the BIOS and FPGA firmware.
 - After a BIOS firmware update, the boot option is reset to PXE. It is therefore necessary to change the boot option after the update if PXE is not desired boot option.
 - Select the **Force Update** box to reinstall the same firmware version.
-

Chapter 6. Managing RAID configurations

Important **ATTENTION: Please read carefully the safety instructions before you perform the procedures described in this manual. See the *Multilingual Safety Notices Guide* for translated versions of the safety notices.**



WARNING W083

Do not change BIOS setup settings unless directed to do so by the support team.



WARNING W082

These procedures are for advanced users only. Risk of system damage.


To enable Virtual RAID On CPU (Intel® VROC), a hardware key must be inserted onto the motherboard, and the appropriate socket Virtual Management Devices (VMD) must be enabled in the BIOS settings.

6.1. Configuration rules


- For RAID5 volumes, an Intel® VROC premium key is required.
- A RAID volume can be used as a bootable disk only if all disks in the RAID volume are connected to a single VMD domain. It is possible to create RAID volumes spanning multiple VMD domains, however such RAID configurations are not bootable.

6.2. Disks location

BullSequana EXR

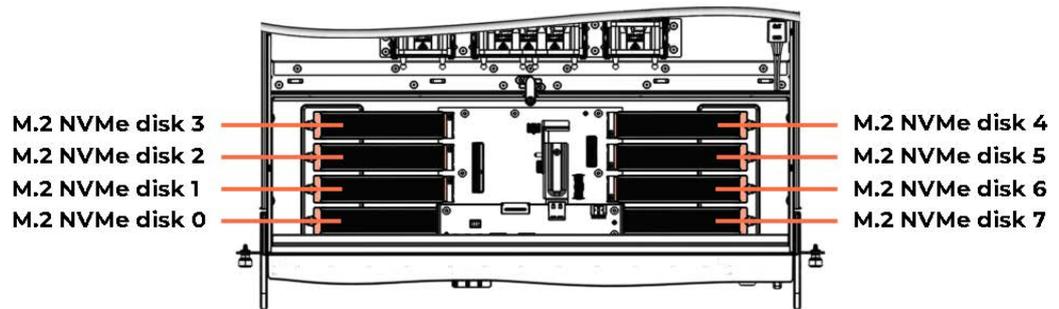


BullSequana EXD

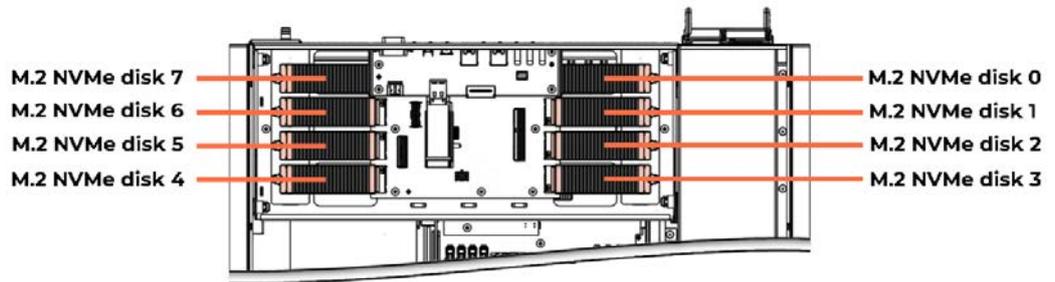


| Disk module | Socket | IOU | VMD port |
|-----------------|--------|-------|----------|
| M.2 NVMe disk 0 | 0 | IOU 3 | A |
| M.2 NVMe disk 1 | 0 | IOU 3 | C |
| M.2 NVMe disk 2 | 0 | IOU 3 | E |
| M.2 NVMe disk 3 | 0 | IOU 3 | G |
| M.2 NVMe disk 4 | 0 | IOU 4 | A |
| M.2 NVMe disk 5 | 0 | IOU 4 | C |
| M.2 NVMe disk 6 | 0 | IOU 4 | E |
| M.2 NVMe disk 7 | 0 | IOU 4 | G |

6.3. Intel VROC mapping

BullSequana EXR

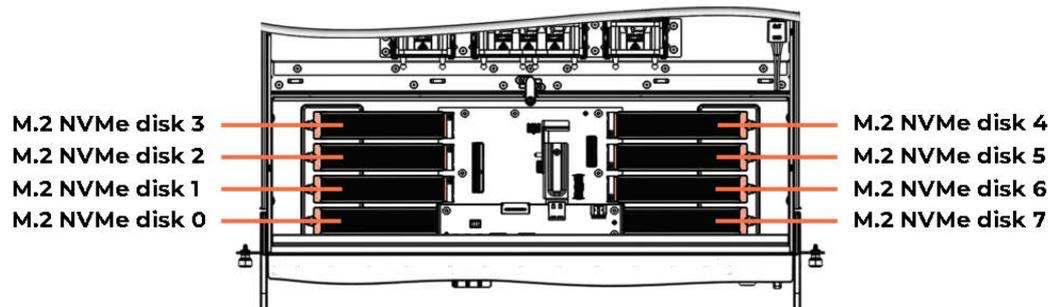

BullSequana EXD

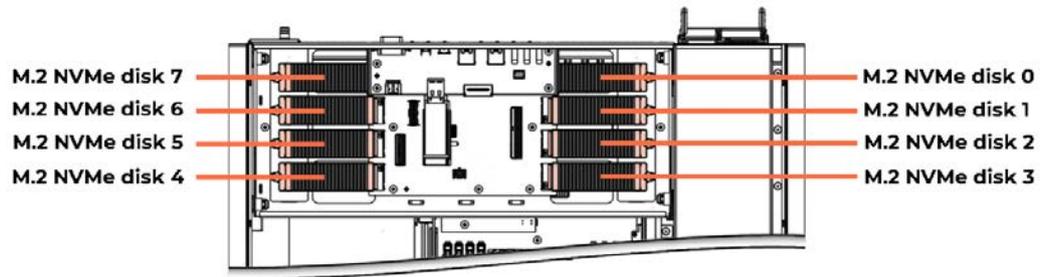


| Physical location | BIOS |
|-------------------|--|
| M.2 NVMe disk 0 | Port 3.0, Slot 8, CPU0, VMD3, BDF 0A.00.0 |
| M.2 NVMe disk 1 | Port 3.1, Slot 9, CPU0, VMD3, BDF 0B.00.0 |
| M.2 NVMe disk 2 | Port 3.2, Slot 10, CPU0, VMD3, BDF 0C.00.0 |
| M.2 NVMe disk 3 | Port 3.3, Slot 11, CPU0, VMD3, BDF 0D.00.0 |
| M.2 NVMe disk 4 | Port 4.0, Slot 12, CPU0, VMD4, BDF 0A.00.0 |
| M.2 NVMe disk 5 | Port 4.1, Slot 13, CPU0, VMD4, BDF 0B.00.0 |
| M.2 NVMe disk 6 | Port 4.2, Slot 14, CPU0, VMD4, BDF 0C.00.0 |
| M.2 NVMe disk 7 | Port 4.3, Slot 15, CPU0, VMD4, BDF 0D.00.0 |

6.4. Configuring RAID disks

Prerequisite

The appropriate Intel® VROC key is inserted on the ORMB board.


| Intel® VROC key type | RAID level |
|----------------------|------------------|
| Standard | RAID 0, 1, 10 |
| Premium | RAID 0, 1, 5, 10 |

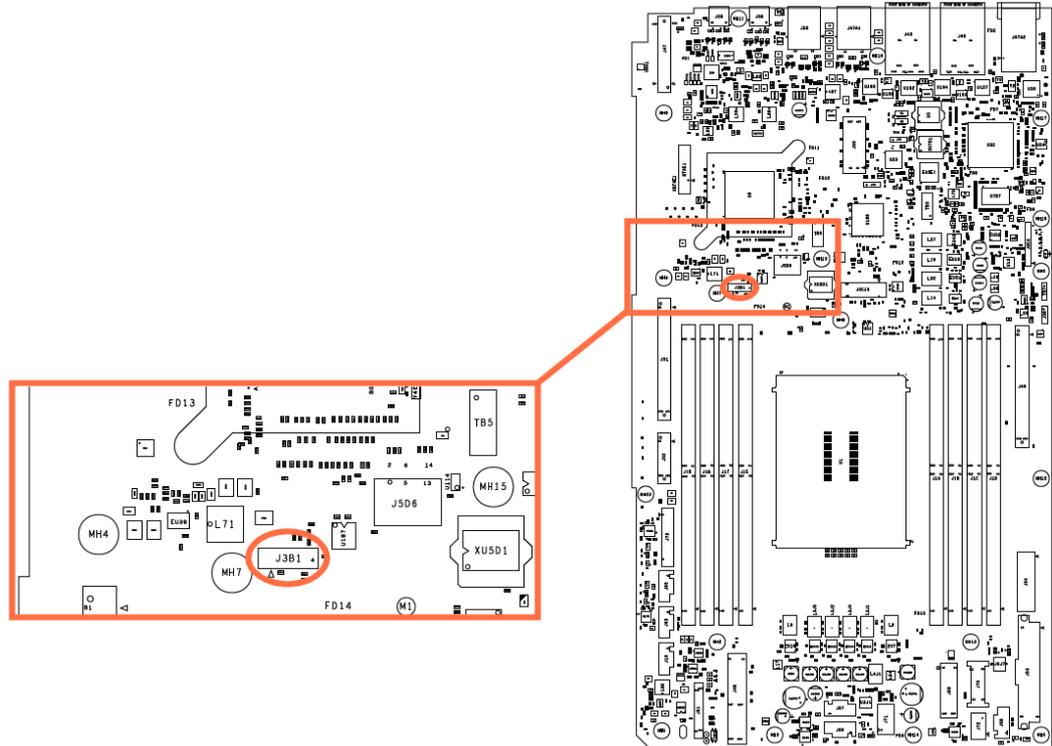

Procedure

1. Access the BIOS interface

1. Wait a few minutes for the following screen to be displayed.

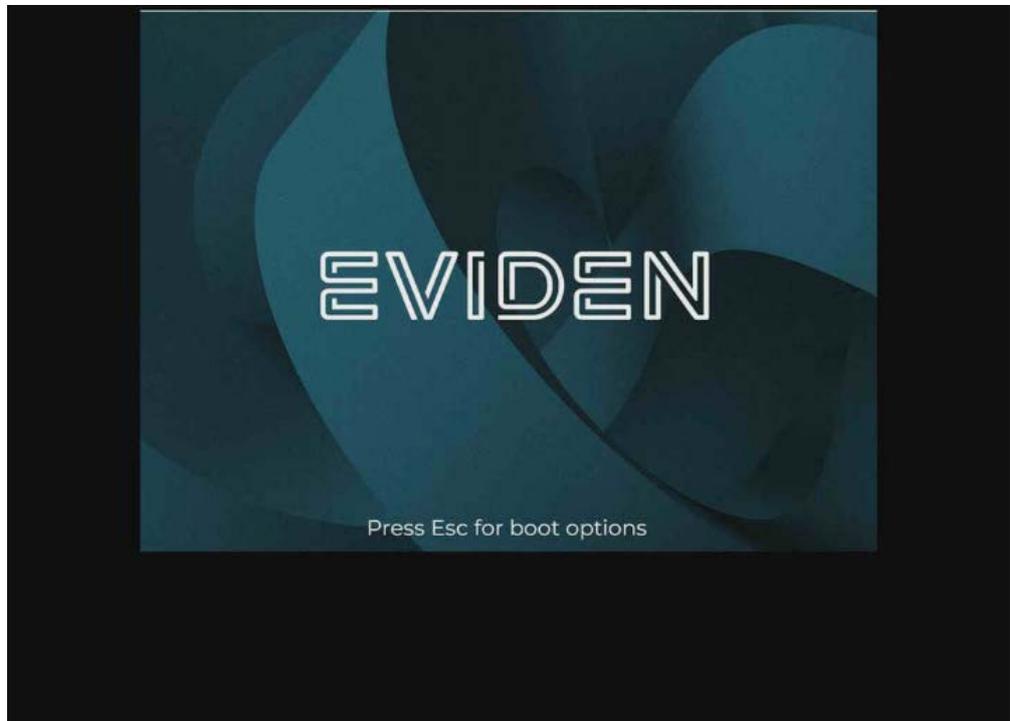

2. Press **[ESC]** to display the BIOS interface.
3. Select **Setup utility** from the main menu.



2. Configure VMD for M.2 disks


1. From **Advanced**, select **Socket Configuration**.



2. Select **IIO Configuration**.



3. Select **Intel VMD technology**.

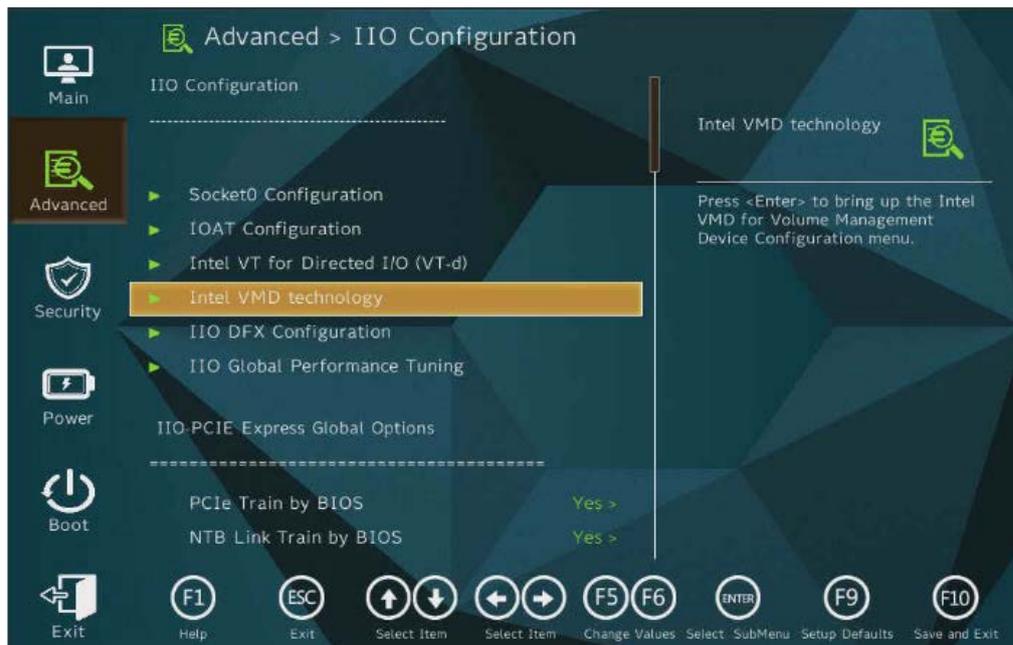


4. Select **Intel VMD for Volume Management Device on socket 0**.



5. In sections **VMD Config for IOU 3** and **VMD Config for IOU 4**, enable:

- Enable/Disable VMD
- VMD port A
- VMD port C
- VMD port E
- VMD port G
- Hot Plug capable

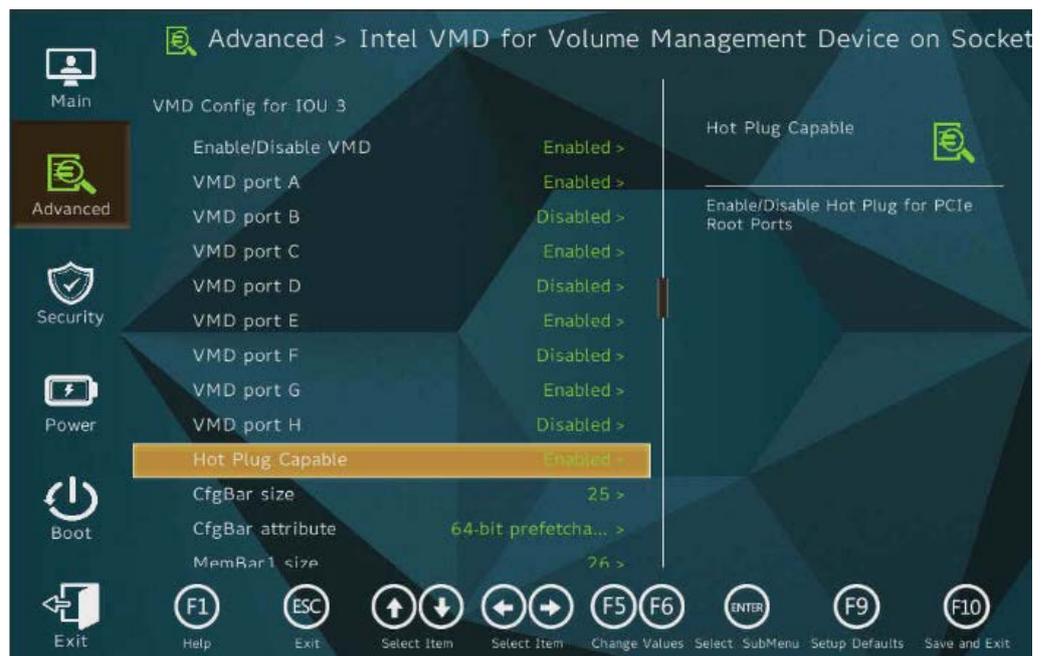

3. Configure settings for SATA disks


1. From **Advanced**, select **PCH-IO Configuration**.




2. Select **SATA and RST Configuration**.



3. Select **Controller 2 SATA and RST Configuration**.

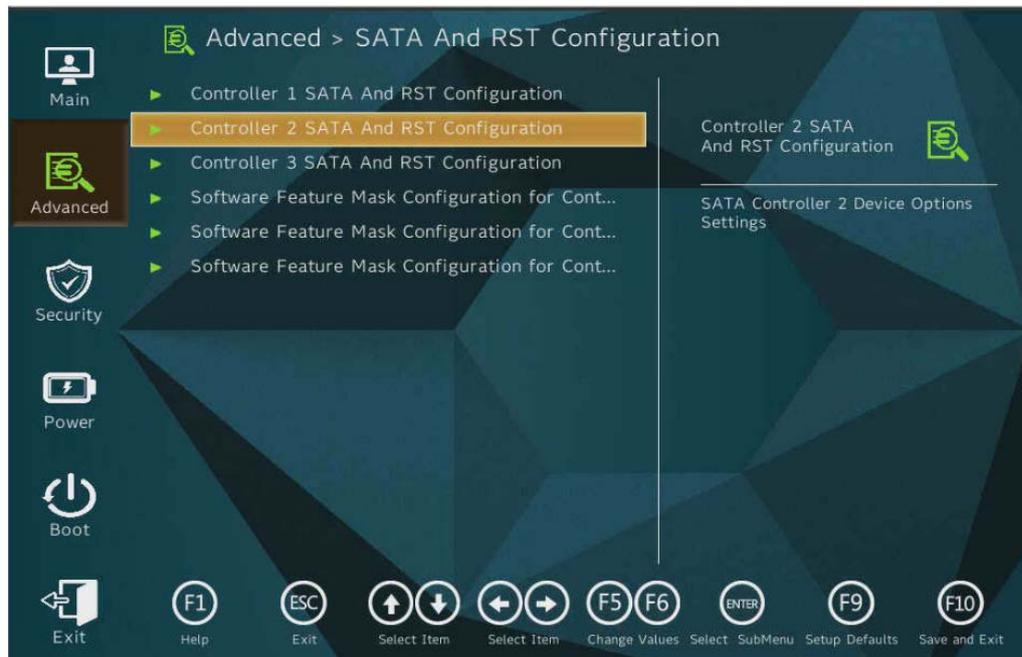

4. Change **SATA Mode Selection** to RAID.

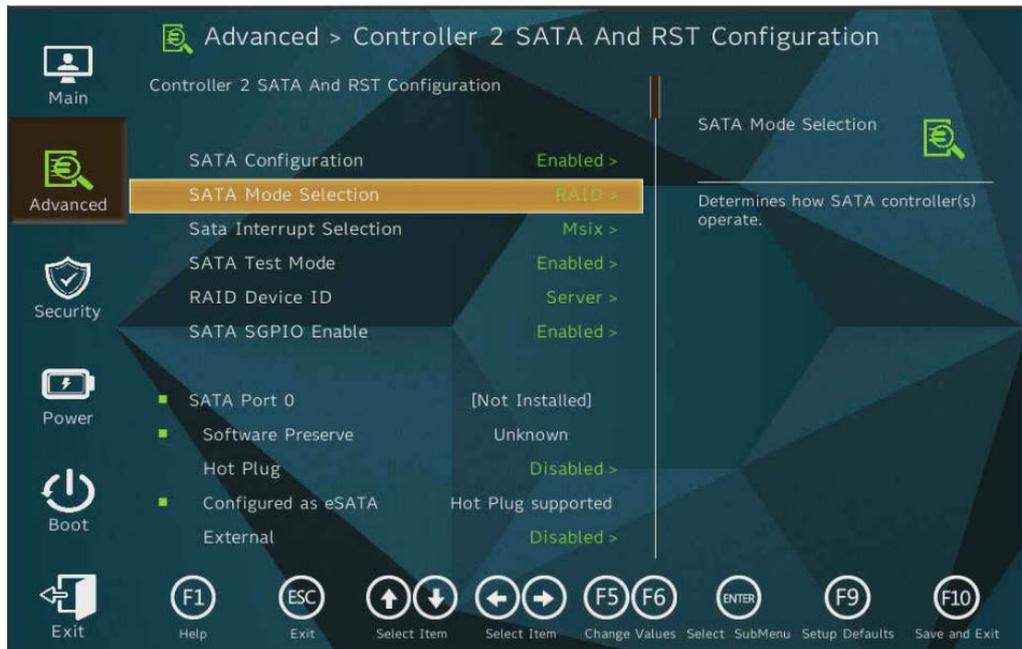

4. Save changes

1. Click **Exit**.
2. Click **Exit Saving Changes**.
3. Click **Yes** in the **Exit** dialog box.

5. Reboot the system

6. Check the configuration after reboot

1. Select **Device management** from the main menu.




2. In **Device Management**, check that the new device **Intel(R) Virtual RAID on CPU** is created.




3. Select **Intel(R) Virtual RAID on CPU**.

4. Select **All Intel VMD Controllers**.

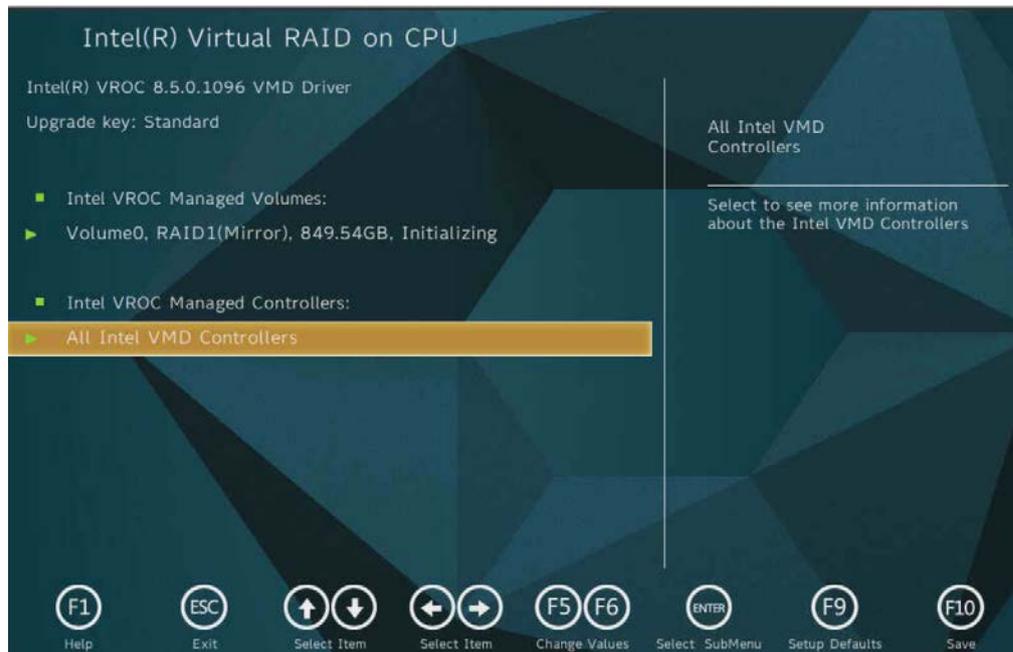


5. Check the configuration.

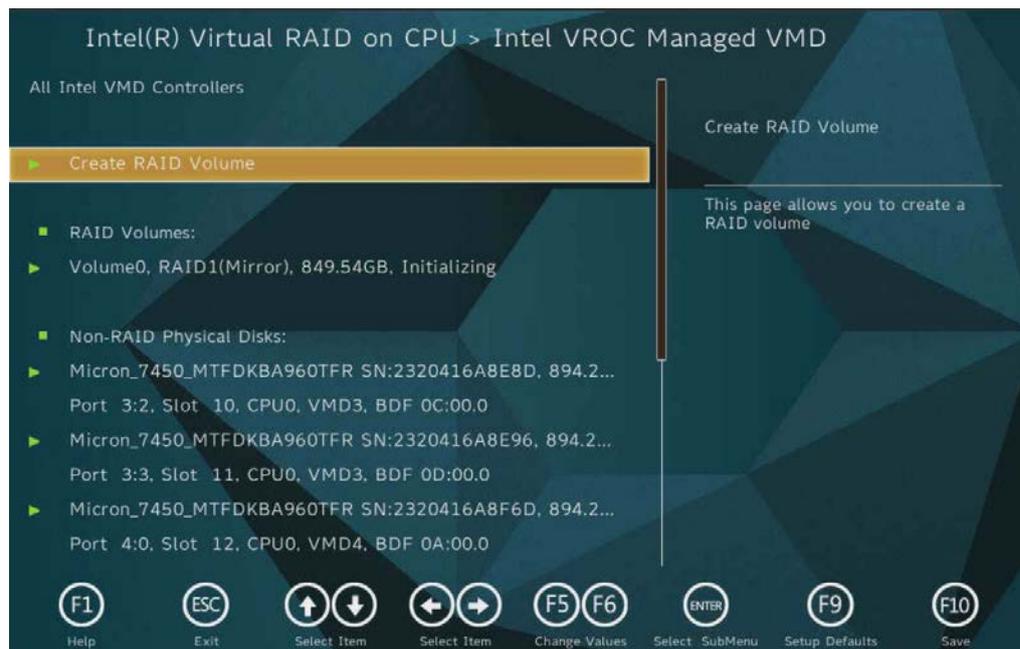


7. Configure RAID volumes


1. From the **Device Management** menu, select **Intel(R) Virtual RAID on CPU**.
2. Select **All Intel VMD Controllers**.
3. Select **Create RAID Volume**.

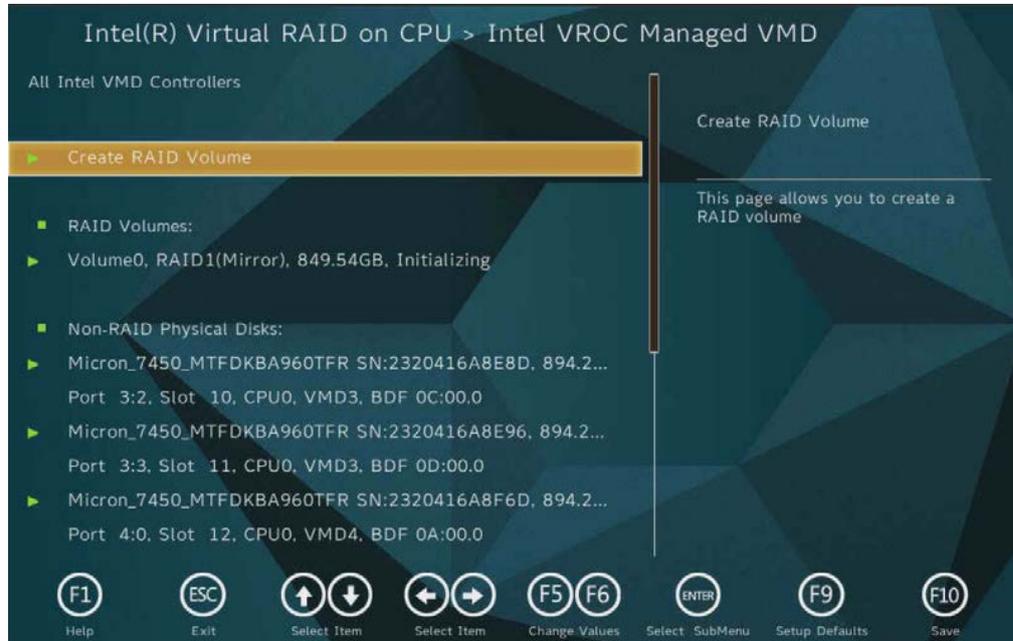

4. Create the RAID volume:
 - a. Select the **RAID Level**: 0,1 or 10.
 - b. Select **Enable RAID spanned over VMD Controllers** to create RAID volumes spanning multiple VMD domains.
 - c. Select the required disks in **Select Disks** section.
 - d. Select **Create Volume**.

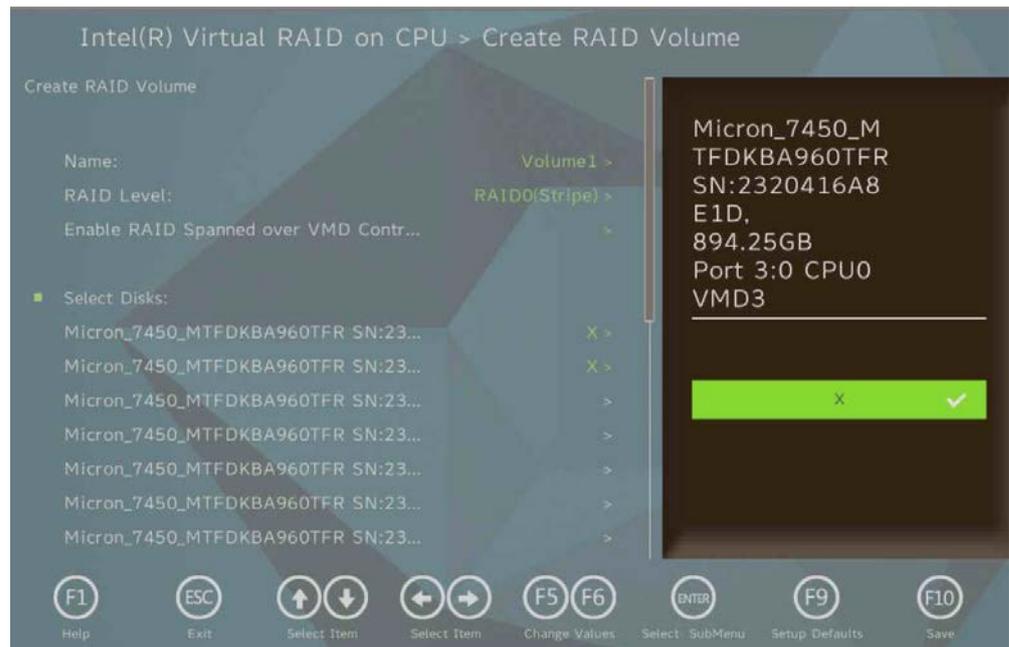

5. Click **Yes** in the **Create Volume** dialog box.

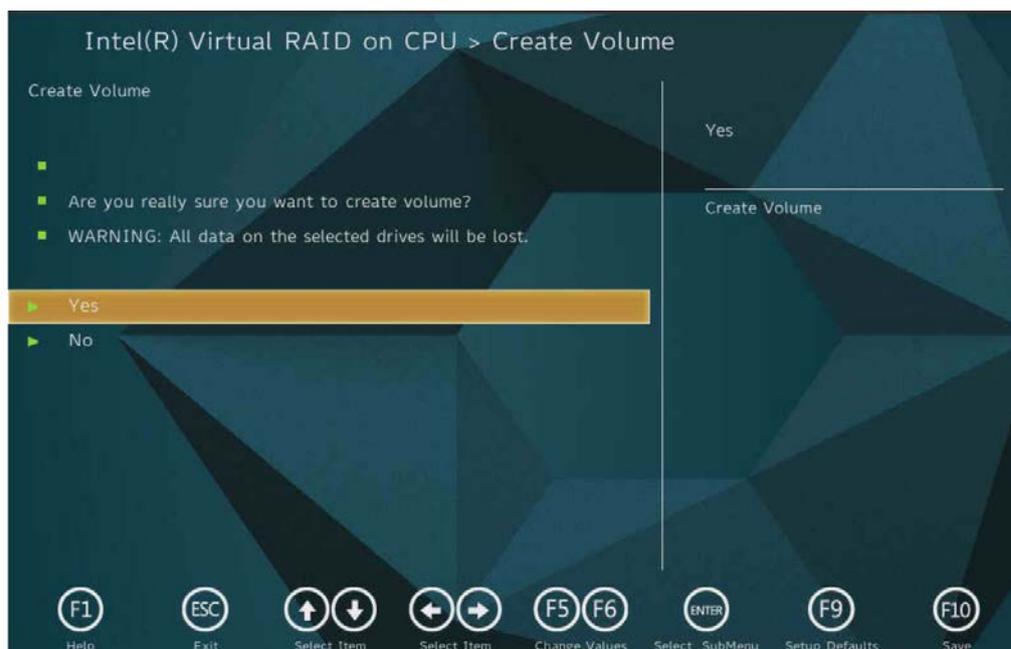

Appendix A. Pre-installation steps for Windows Server 2022


The Windows Server 2022 operating system (OS) can be installed on different storage configurations using the installation ISO image.

In some cases, it is necessary to load a driver to be able to access the storage devices.


See The Bull support web site for the necessary drivers:
<https://support.bull.com>

Procedure

1. Click Load Driver on the following screen

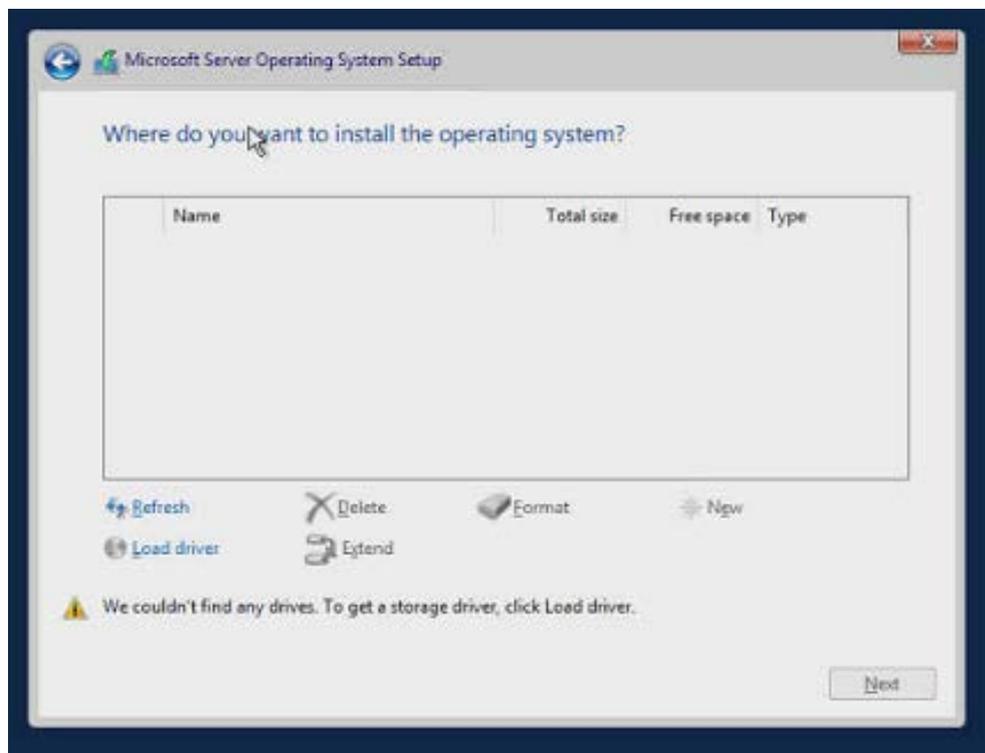

2. Browse the location of the driver

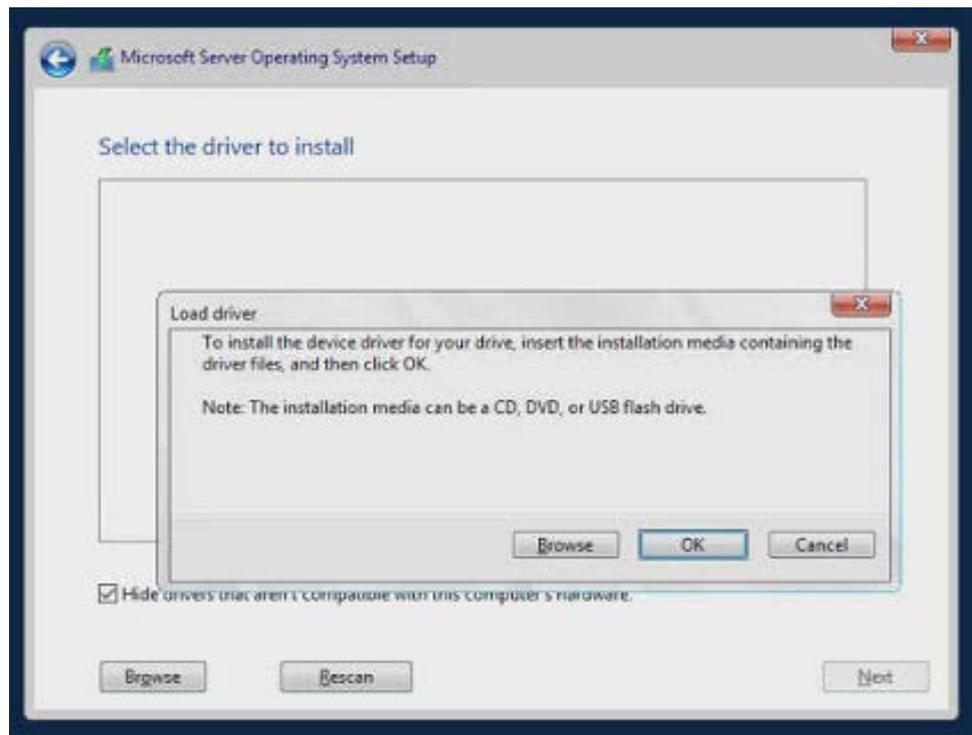


3. Select the driver


The driver can be copied to the installation media before starting, or to another USB drive.

Driver added to the installation media

1. Select the driver folder that is present on the Windows Installation USB drive.

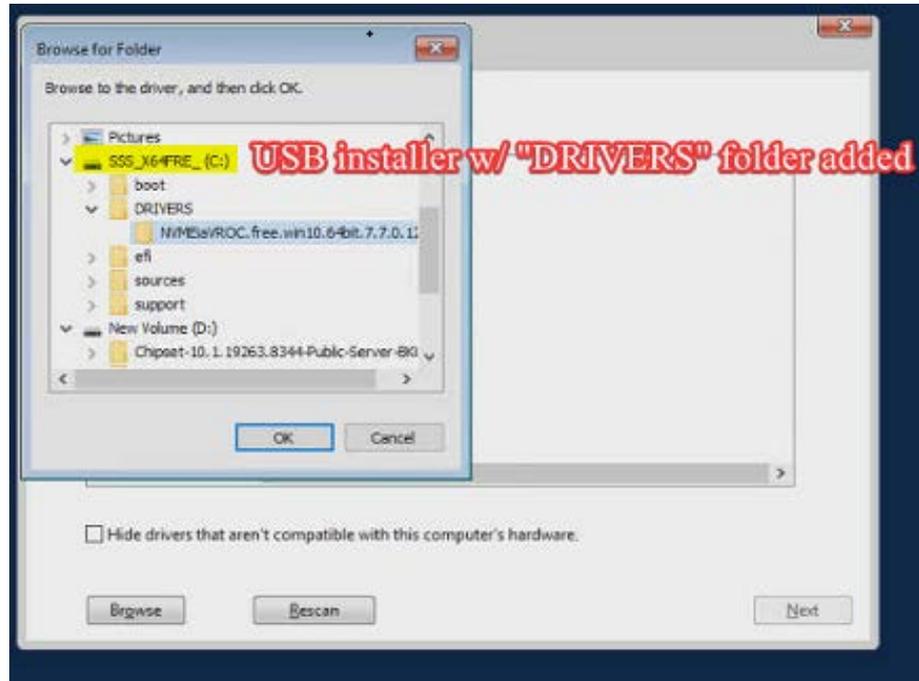


2. Select the driver to install.

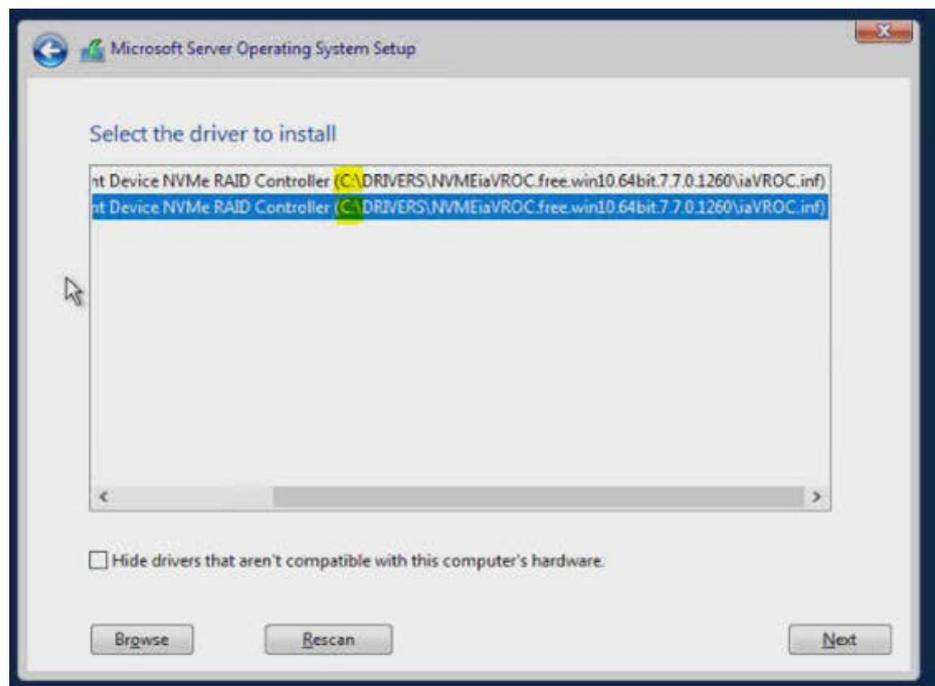


Driver on another USB drive

1. Select the driver folder that is present on a separate drive.

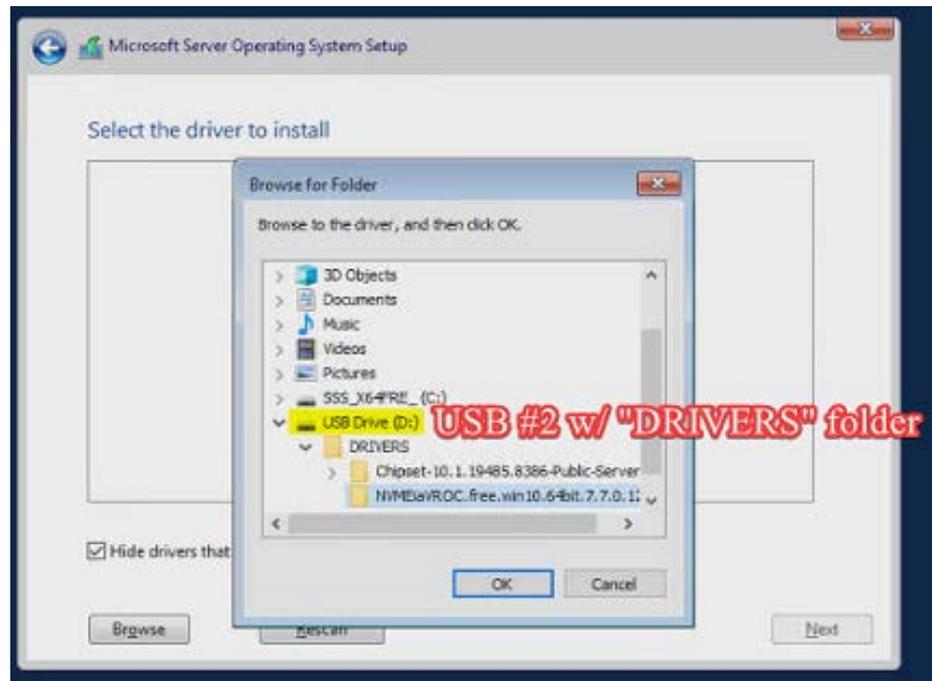

2. Select the driver to install.

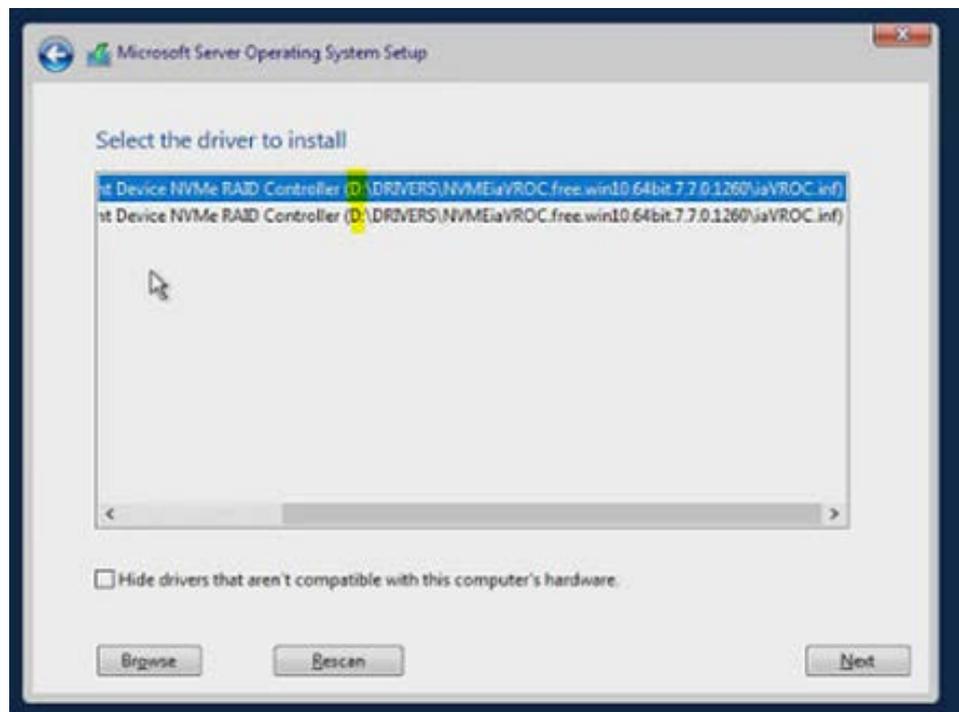

4. Select one of the NVMe drives present to continue installation

